
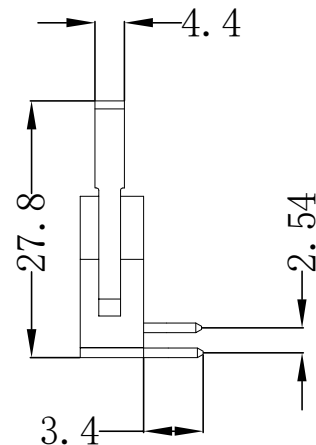
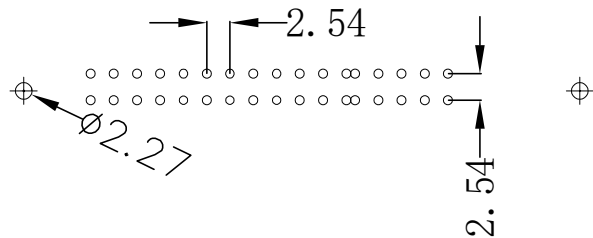

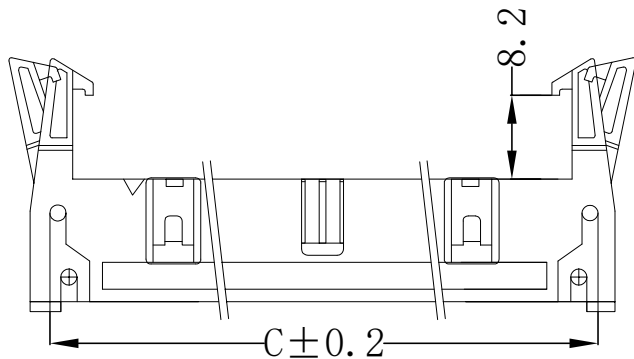


RoHS

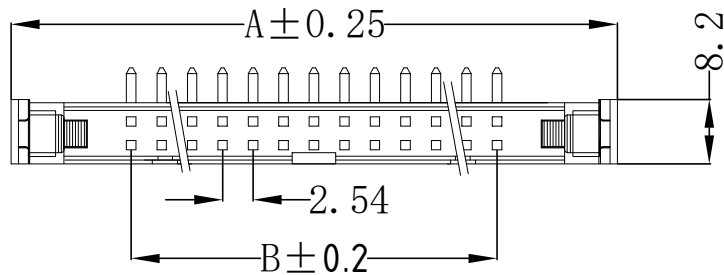

Technical Parameters:  
 Rated current: 1A AC/DC  
 Withstand voltage: 500V AC/minute  
 Insulation resistance: 1000MΩ min  
 Contact resistance: 20MΩ MAX  
 Operating temperature: -40° C ~ +105° C  
 Insulator Material: PBT UL94V-0  
 Contact Plating: Flash Gold  
 Contact Material: Brss

东莞市晟凯达电子科技有限公司  
 工程专用章

受控

NUMBER OF POSITIONS	DIMENSION		
	A	B	C
10	32.00	10.16	27.94
14	34.54	12.70	33.02
16	39.62	17.78	35.56
20	44.60	22.86	39.70
24	49.78	27.94	45.72
26	52.32	30.48	48.26
30	57.40	35.56	53.34
34	62.48	40.64	58.42
40	70.10	48.26	66.04
50	82.80	60.96	78.74
60	95.50	73.66	91.44
64	100.58	78.74	96.72

					OPERATION	DRAW	YANG	2016.06.06	SCALE	—	 SCONDAR ELECTRONIC LIMITED	
					X.X ±0.35	DESIGN			UNIT	mm		
					X.XX ±0.25		CHECK	Lisa	2016.06.06	SIZE		A4
AO	2016.06.06	NEW	—	—	X.XXX ±0.15	APPROVE				SHEET		1/1
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ±3°	DIM	TOL	APPROVE	PROJ.	⊕	TITLE:	EH2.54 MH=8.2 H=27.8 2xXXPin Gold PBT BK RT Box Header (高耳牛角配三件式IDC)