


RoHS

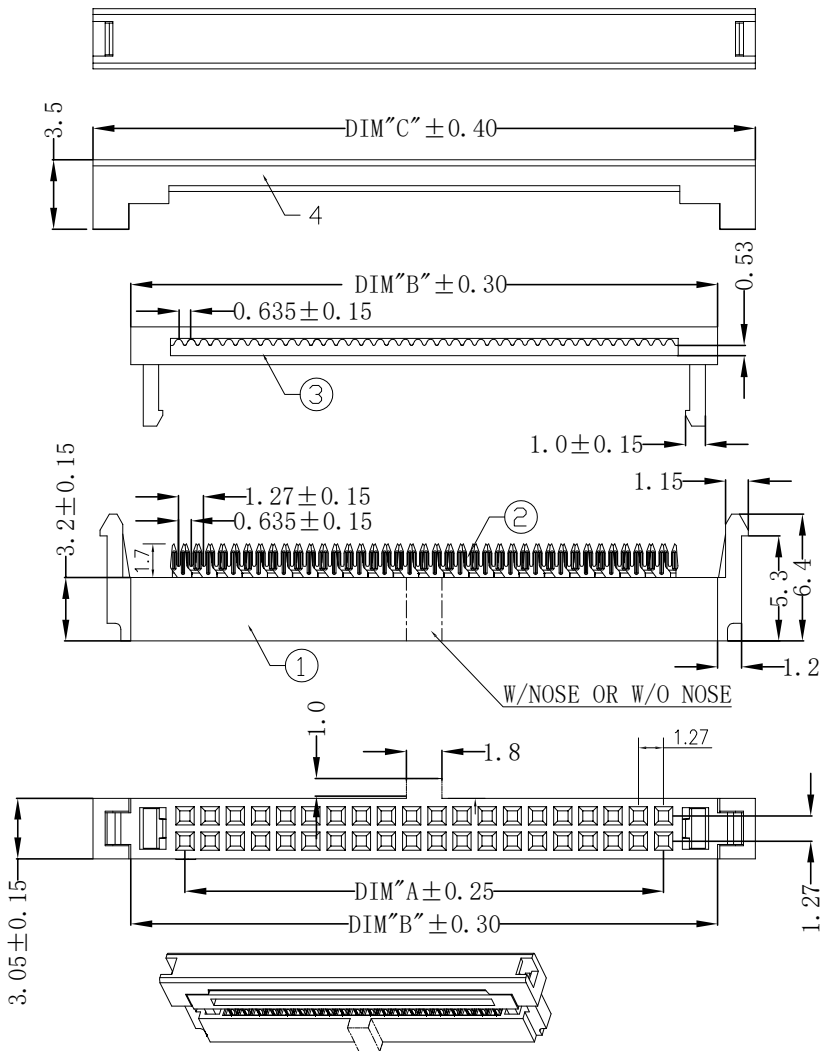

Technical Parameters:
 Rated current: 1A AC/DC
 Withstand voltage: 1500V AC/minute
 Insulation resistance: 1000MΩ min
 Contact resistance: 20M MAX
 Operating temperature: -40° C ~ +105° C
 Insulator Material: PBT UL 94V-0
 Contact Plating: Gold flash over nicker
 Contact Material: Brass or Phosphorous Bronze

东莞市晟凯达电子科技有限公司
 工程专用章

受控

NUMBER OF POSITIONS	DIMENSION			NUMBER OF POSITIONS	DIMENSION			NUMBER OF POSITIONS	DIMENSION		
	A	B	C		A	B	C		A	B	C
06	2.54	8.00	11.80	26	15.24	20.70	24.50	60	36.83	42.29	46.09
08	3.81	9.27	13.07	30	17.78	23.24	28.31	64	39.37	44.83	48.63
10	5.08	10.54	14.34	32	19.05	24.51	27.04	66	40.64	46.10	49.90
12	6.35	11.81	15.61	34	20.32	25.78	29.58	68	41.91	47.37	51.17
14	7.62	13.08	16.88	36	21.59	27.05	30.85	70	43.18	48.64	52.44
16	8.89	14.35	18.15	40	24.13	29.59	33.39	74	45.72	51.18	54.98
20	11.43	16.89	20.69	44	26.67	32.13	35.93	76	46.99	52.45	56.25
24	13.97	19.43	23.23	50	30.48	35.94	39.74	80	49.53	54.99	58.79

					OPERATION	DRAW	YANG	2016.06.06	SCALE	—	 SCONDAR ELECTRONIC LIMITED	
					X.X ± 0.35	DESIGN			UNIT	mm		
					X.XX ± 0.25		CHECK	Lisa	2016.06.06	SIZE		A4
AO	2016.06.06		NEW		X.XXX ± 0.15	APPROVE				SHEET		1/1
REV	DATE		MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ± 3°			PROJ.		TITLE:	PHI.27 2xXXPin Gold with Bump SR PBT BK Tray IDC Socket
					DIM TOL							