

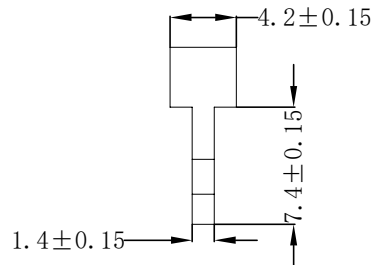
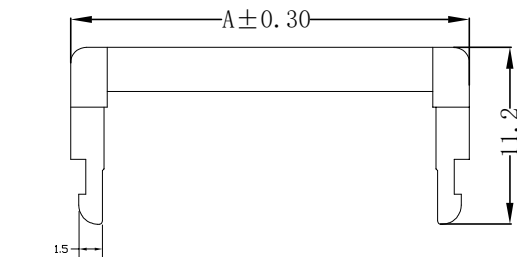

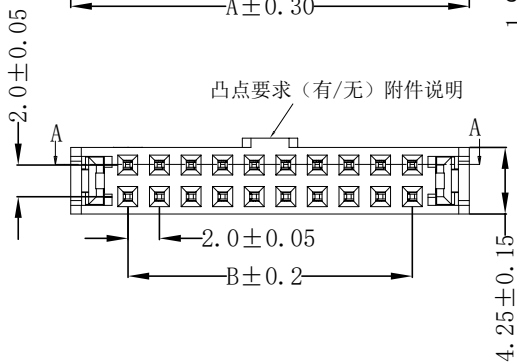

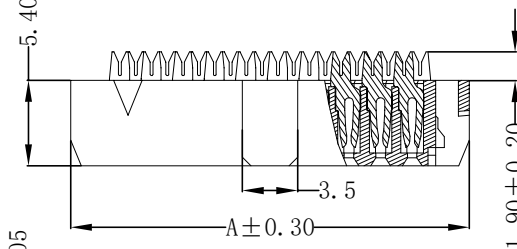


# RoHS



Technical Parameters:  
 Rated current: 1A AC/DC  
 Withstand voltage: 500V AC/minute  
 Insulation resistance: 1000MΩ min  
 Contact resistance: 20M MAX  
 Operating temperature: -40° C ~ +105° C  
 Insulator Material: PBT UL 94V-0  
 Contact Plating: Gold flash over nicker  
 Contact Material: Brass or Phosphorous Bronze

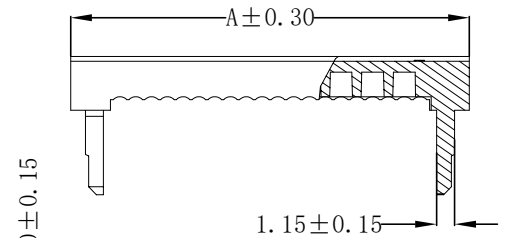

东莞市晟凯达电子科技有限公司  
 工程专用章

受控

NUMBER OF POSITIONS	DIMENSION	
	A	B
6	11.20	4.00
8	13.20	6.00
10	15.20	8.00
12	17.20	10.00
14	19.20	12.00
16	21.20	14.00
18	23.20	16.00
20	25.20	18.00
22	27.20	20.00
24	29.20	22.00
26	31.20	24.00
28	33.20	26.00
30	35.20	28.00
34	39.20	32.00
36	41.20	34.00
40	45.20	38.00
44	49.20	42.00
50	55.20	48.00
60	65.20	58.00

					OPERATION	DRAW	YANG	2016.06.06	SCALE	—	 SCONDAR ELECTRONIC LIMITED
					X.X ±0.35	DESIGN			UNIT	mm	
					X.XX ±0.25	CHECK	Lisa	2016.06.06	SIZE	A4	
					X.XXX ±0.15	APPROVE			SHEET	1/1	
AO	2016.06.06	NEW			Angle ±3°				PART NO.	IDC200N3-2xxGD3503	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM TOL	APPROVE			PROJ.	TITLE:	FC PH2.00mm 2xXXPin Gold with Bump SR PBT BK Tray IDC Socket