


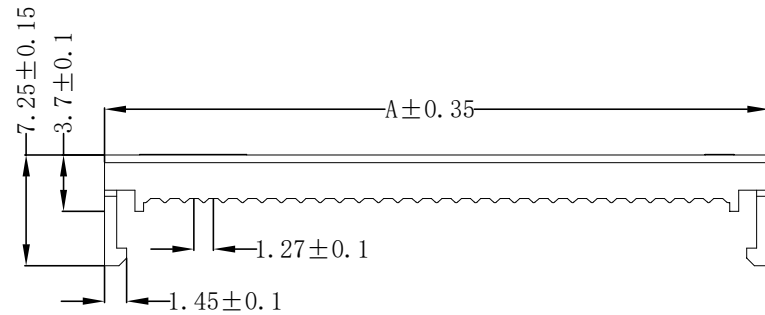



RoHS





Technical Parameters:  
 Rated current: 1A AC/DC  
 Withstand voltage: 500V AC/minute  
 Insulation resistance: 1000MΩ min  
 Contact resistance: 20M MAX  
 Operating temperature: -40° C ~ +105° C  
 Insulator Material: PBT UL 94V-0  
 Contact Plating: Gold flash over nicker  
 Contact Material: Brass

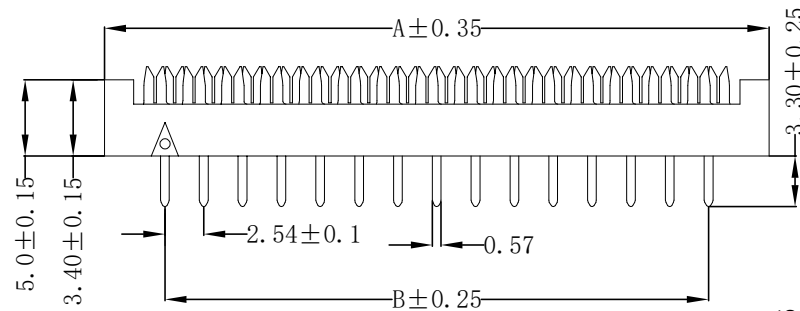

东莞市晟凯达电子科技有限公司  
 工程专用章

受控

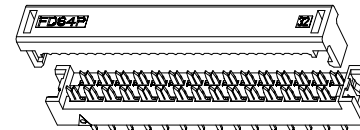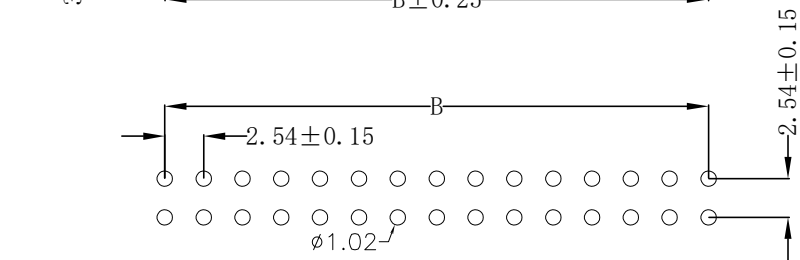

NUMBER OF POSITIONS	DIMENSION	
	A	B
6.00	12.98	5.08
8.00	15.52	7.62
10.00	18.06	10.16
12.00	20.60	12.70
14.00	23.14	15.24
16.00	25.68	17.78
18.00	28.22	20.32
20.00	30.76	22.86
22.00	33.30	25.40
24.00	35.84	27.94
26.00	38.38	30.48
30.00	43.46	35.56
34.00	48.52	40.64
40.00	56.16	48.26
44.00	61.24	53.34
50.00	68.86	60.96
60.00	81.56	73.66
64.00	86.64	78.74

					OPERATION	DRAW	YANG	2016.06.06	SCALE	—	 SCONDAR ELECTRONIC LIMITED	
					X.X ±0.35	DESIGN			UNIT	mm		
					X.XX ±0.25	CHECK	Lisa	2016.06.06	SIZE	A4		
A0	2016.06.06	NEW			X.XXX ±0.15	APPROVE			SHEET	1/1		PART NO.
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ±3°				PROJ.	⌀	TITLE:	PH2.54mm 2xxPin Gold with Bump NO-SR PBT BK Tray IDC Socket
					DIM	TOL						