


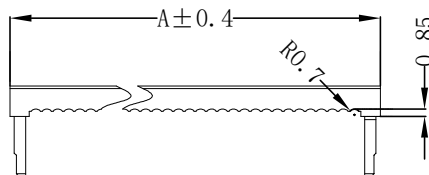
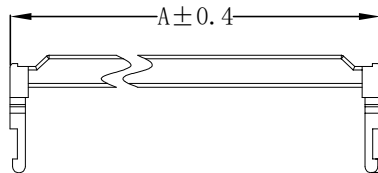





RoHS







Technical Parameters:
 Rated current: 1A AC/DC
 Withstand voltage: 1500V AC/minute
 Insulation resistance: 1000MΩ min
 Contact resistance: 20M MAX
 Operating temperature: -40° C ~ +105° C
 Insulator Material: PBT UL 94V-0
 Contact Plating: Gold flash over nicker
 Contact Material: Brass or Phosphorous Bronze

受控

东莞市晟凯达电子科技有限公司
 工程专用章




6P 小鼻/无槽 6P 大鼻/无槽 8P 大鼻/无槽

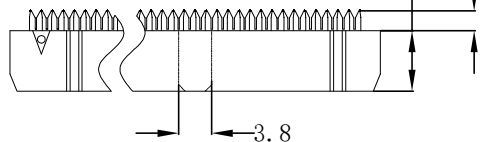


有三角标示是第一-PIN位


NUMBER OF POSITIONS	DIMENSION		
	A	B	C
6.00	12.32	5.08	1.90
8.00	14.86	7.62	小1.9/大3.8
10.00	17.40	10.16	3.80
12.00	19.94	12.70	3.80
14.00	22.48	15.24	3.80
16.00	25.02	17.78	3.80
18.00	27.56	20.32	3.80
20.00	30.10	22.86	3.80
22.00	32.64	25.40	3.80
24.00	35.18	27.94	3.80
26.00	37.72	30.48	3.80
30.00	42.80	35.56	3.80
34.00	47.88	40.64	3.80
36.00	50.42	48.26	3.80
40.00	55.50	53.34	3.80
50.00	68.20	60.96	3.80
60.00	80.90	73.66	3.80
64.00	85.98	78.74	3.80



10P-12P 单槽

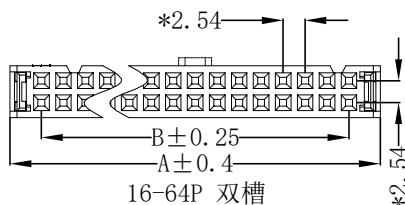

16-64P 双槽



6P 小鼻/单槽 8P 小鼻/单槽

					OPERATION	DRAW	YANG	2016.06.06	SCALE	—	 SCONDAR ELECTRONIC LIMITED	
					X.X ±0.35	DESIGN			UNIT	mm		
					X.XX ±0.25		CHECK	Lisa	2016.06.06	SIZE		A4
A0	2016.06.06	NEW			X.XXX ±0.15	APPROVE				SHEET		1/1
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ±3°	APPROVE			PROJ.	⊕	TITLE:	FC PH2.54mm 2xXXPin Gold with Bump SR PBT BK Tray IDC Socket
					DIM TOL							