


RoHS

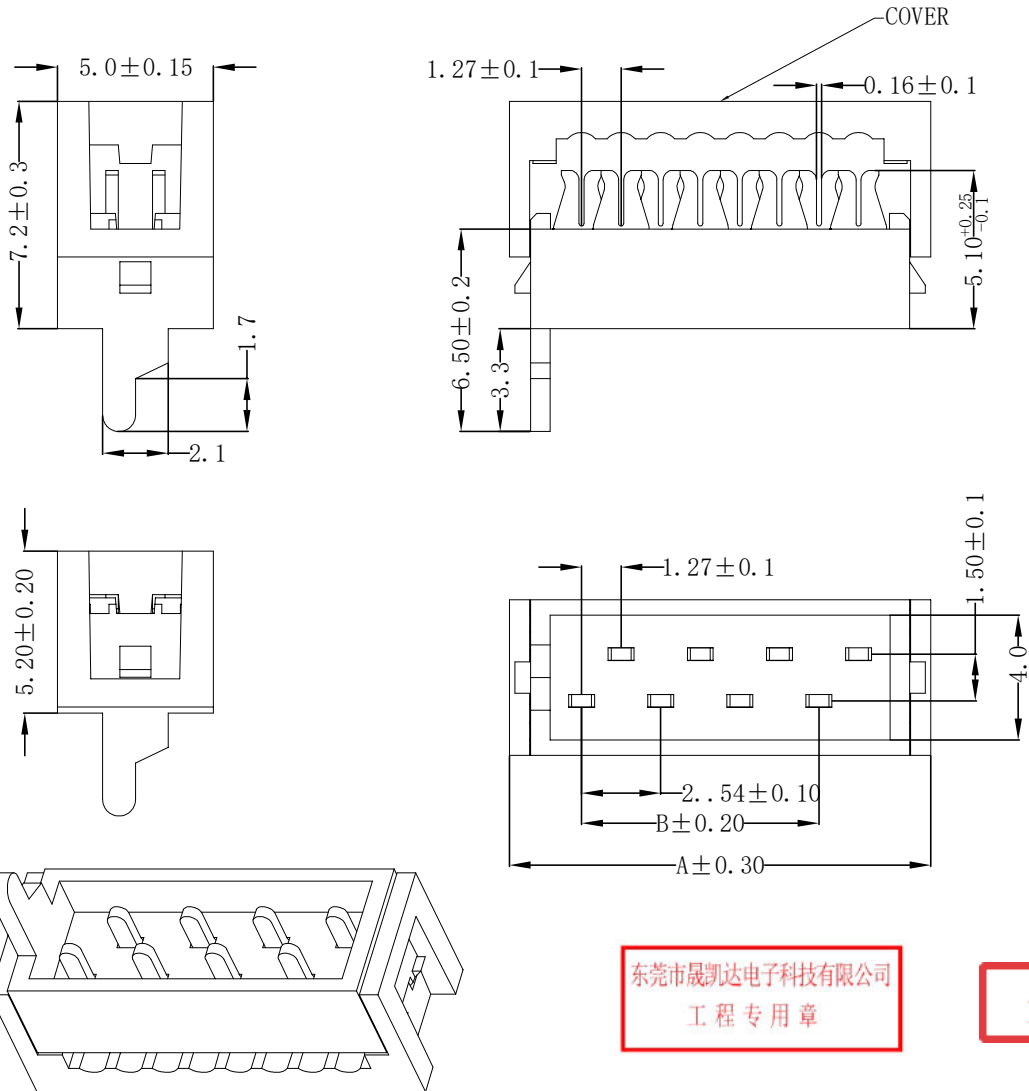

Technical Parameters:
 Rated current: 1A AC/DC
 Withstand voltage: 500V AC/minute
 Insulation resistance: 1000MΩ min
 Contact resistance: 20M MAX
 Operating temperature: $-40^{\circ}C \sim +105^{\circ}C$
 Insulator Material: PBT UL 94V-0
 Contact Plating : Sn Over Ni
 Contact Material: Brass

NUMBER OF POSITIONS	DIMENSION	
	A	B
4	8.45	2.54
6	10.99	5.08
8	13.53	7.62
10	16.07	10.16
12	18.61	12.70
14	21.15	15.24
16	23.69	17.78
18	26.23	20.32
20	28.77	22.86
22	31.31	25.40
24	33.85	27.94
26	36.39	30.48

东莞市晟凯达电子科技有限公司
 工程专用章

受控

					OPERATION	DRAW	YANG	2016.06.06	SCALE	—	 SCONDAR ELECTRONIC LIMITED	
					X.X ±0.35	DESIGN			UNIT	mm		
					X.XX ±0.25				SIZE	A4		
					X.XXX ±0.15		CHECK	Lisa	2016.06.06	SHEET		1/1
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ±3°	APPROVE			PROJ.		TITLE:	IDC Red PH2.54 2xxxPin Tin with Bump PBT RD Tray IDC Socket