


RoHS

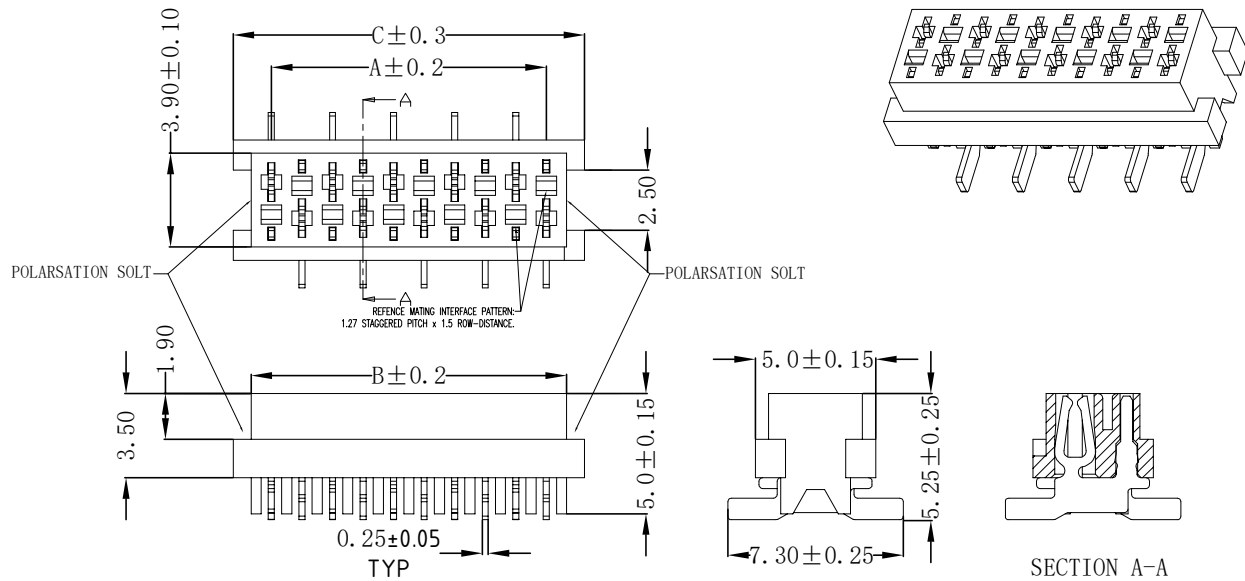


Technical Parameters:
 Rated current: 1A AC/DC
 Withstand voltage: 1000V AC/minute
 Insulation resistance: 1000MΩ min
 Contact resistance: 20M MAX
 Operating temperature: -40° C ~ +105° C
 Insulator Material: PA9T UL 94V-0 Red (红色)
 Contact Plating: tin over nicker
 Contact Material: Brass

NUMBER OF POSITIONS	DIMENSION		
	A	B	C
04	3.81	5.50	6.99
06	6.35	8.04	9.53
08	8.89	10.58	12.07
10	11.43	13.12	14.61
12	13.97	15.66	17.15
14	16.51	18.20	19.69
16	19.05	20.74	22.23
18	21.59	23.28	24.77
20	24.13	25.82	27.31
22	26.67	28.36	29.85
24	29.21	30.90	32.39
26	31.75	33.44	34.93

受控

东莞市晟凯达电子科技有限公司
 工程专用章

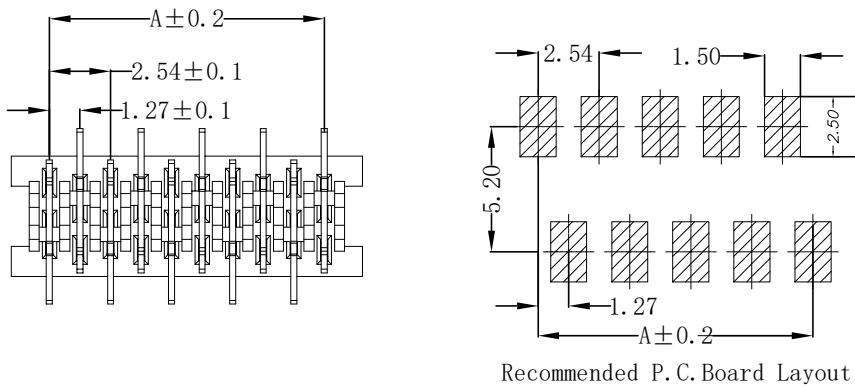

					OPERATION	DRAW	YANG	2016.06.06	SCALE	—
					X.X ±0.35	DESIGN			UNIT	mm
					X.XX ±0.25				SIZE	A4
					X.XXX ±0.15		CHECK	Lisa	2016.06.06	SHEET
AO	2016.06.06		NEW		Angle ±3°	APPROVE			PART NO.	IDC254RDWVS-2XXTE3503
REV	DATE		MODIFICATION DESCRIPTION	CHANGE	DIM TOL	APPROVE			PROJ.	◆ ◀ TITLE:

SCONDAR
 SCONDAR ELECTRONIC LIMITED
 IDC Red PH2.54 2xXXPin Tin P9T RD Tray IDC Socket