

RoHS


NOTE 1:
 UL Standard
 1. Rated voltage/Rated current: 300V/15A
 2. Withstanding Voltage: AC1600V/Min
 3. Wire range: 28~12AWG
 IEC Standard
 1. Rated voltage/Rated current: 320V/10A

Ordering Information

SCT2EDGKA - 5.08-XX B 4 650

Material
 B=PA66 V0

ITEM	NAMF OF PART	MATFRIAL	NOTFS	Pitch range in mm			Nominal dimension range in mm					公差	形状	DRAW	Zhong	2020.08.02	SCALE	-	UNIT	mm	SHEET	1/1	PART NO.	SCT2EDGKA-5.08-XXB4650
				≤6	6~10	10~24	≤30	30~60	60~100	100~150	>150													
4	(Cage) 方盒	Copper alloy 铜合金	(Ni plated) 镀镍	≤6	6~10	10~24	≤30	30~60	60~100	100~150	>150	0.1/10		DESIGN										
3	(Contact) 触点	Copper alloy 铜合金	(Sn plated) 镀锡	≤6	6~10	10~24	≤30	30~60	60~100	100~150	>150	0.1/10		CHECK	Lisa	2020.08.02								
2	(Screw) 螺丝 M3	Steel 钢	(Ni plated) 镀镍	≤6	6~10	10~24	≤30	30~60	60~100	100~150	>150	0.1/10		APPROVE	Allen	2020.08.02								
1	(Housing) 塑件	PA66	UL94V-0	±0.15	±0.20	±0.30	±0.20	±0.30	±0.50	±0.70	±1.00	±1'												

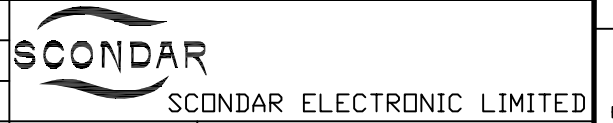

TITLE: /