


RoHS

Specification

1. Rated value: DC500V 40A
2. Insulation resistance: $\geq 100M\Omega$
3. Contact resistance: $\leq 30M\Omega$
4. Withstand voltage: 500V AC
5. Service life: 1000 times
6. Operation Temperature:
-20°C to +120°C
7. Color: orange
8. Main body Material: PA6T 94-V0
9. Pin Material : Brass
10. Plating: Gold

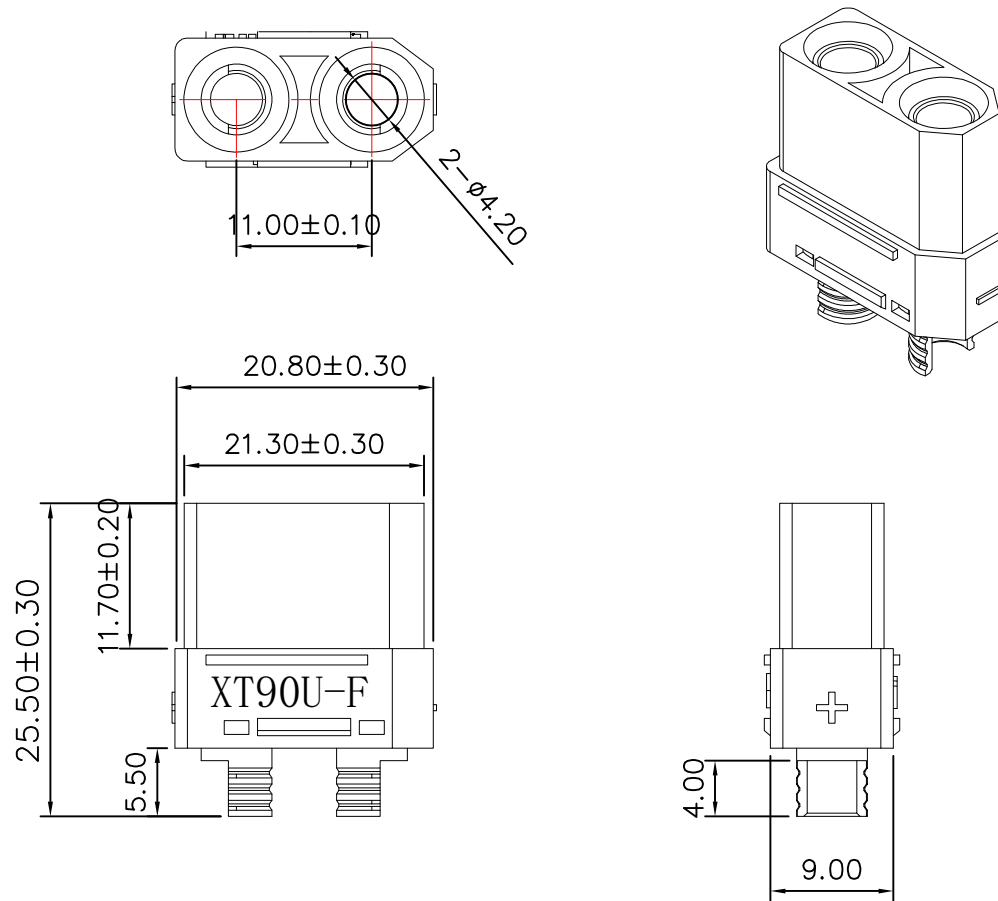

Ordering Information

SCTXT90H - F02G00G-655

SCONDAR ELECTRONIC, LTD
ENGINEER APPROVED LYAO

					OPERATION		DRAW	YAOL	2023.03.03	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
					X.X	±0.35	DESIGN	ZHong	2023.03.04	UNIT	mm		
					X.XX	±0.25				SIZE	A4		
					X.XXX	±0.15				SHEET	1/1		
AO	2021.03.03	NEW			Angle	± 3'	CHECK	LisaL	2023.03.04	PART NO.		SCTXT90H-F02G00G655	
REV	DATE	MODIFICATION DESCRIPTION			DIM	TOL	APPROVE			PROJ.	TITLE:	XT90H PH11mm 02P ST 40A PA6T V0 Brass Gold plated for 10AWG battery Female socket	