
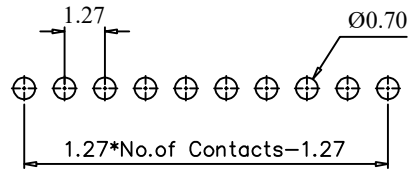


RoHS



受控

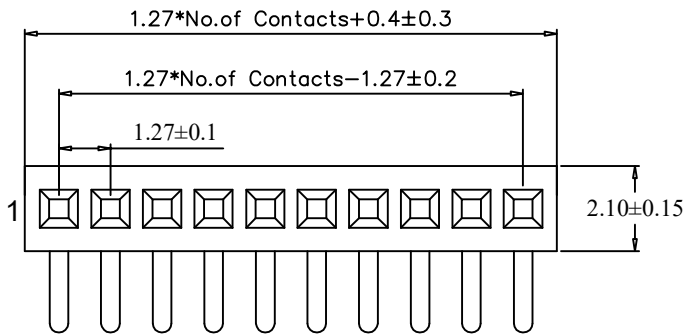

P.C.B Layout

SPECIFICATION:

- Current Rating: 1.0Amps
- Insulation Resistance: 1000MΩ Min
- Contact Resistance:20mΩ Max
- Withstanding Voltage: 500VAC(1Min)
- Max Processing Temp:230°-260°for 30-60 seconds
- Operation Temperature: -40°C to +105°C
- Material:
- Insulator (Housing):PA6T (UL94V-0)
- Contacts:Phosphor bronze
- Contact Plated:Gold Plated
Tin Plated

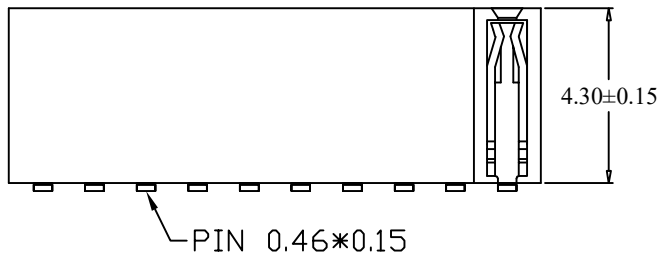

Ordering Information

FH127H430RT-1xx G A 0 301

Insulator height 430=4.30mm
 No.of Pins 120=1x20PIN
 Plating G=Gold Plated
 T=Tin Plated
 G2=Gold 2u"
 G10=Gold 10u"
 Material A=PA6T
 Package 0=PE Bag
 1=Tape&Reel
 2=Tube
 3=Tray

SCONDA ELECTRONIC LTD
 ENGINEER LIU APPROVED

					OPERATION	DRAW	SIMON	2010.03.02	SCALE	-	
					X.X ±0.35	DESIGN	Lyao	2010.03.03	UNIT	mm	
					X.XX ±0.25				SHEET	1/1	
AO	2021.03.16	NEW			X.XXX ±0.15	CHECK	Lisa	2010.03.06	PROJECT		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle DIM	± 3' TOL	APPROVE		TITLE:	FH1.27mm Female Header 1xxp Right Angle Dip Type	