
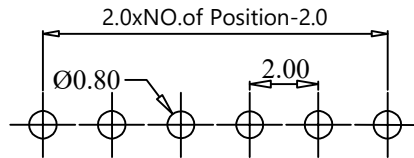


RoHS

受控

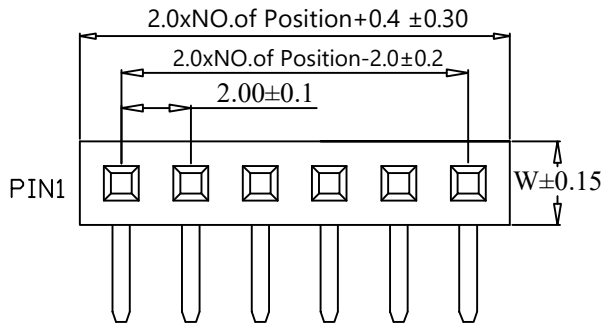

P.C.B Layout

SPECIFICATION:



- Current Rating: 1.5Amps
- Insulation Resistance: 1000MΩ Min
- Contact Resistance:20mΩ Max
- Withstanding Voltage: 500VAC(1Min)
- Max Processing Temp:230°-260°for 30-60s
- Operation Temperature: -40°C to +105°C

Material:

- Insulator (Housing):PA6T (UL94V-0)
- Black Contacts:Brass

Ordering Information

FH200H430		RT-1xx	G	A 0	301
Insulator height	No.of Pins	Plating	Material	Package	
400=4.00mm	120=1x20PIN	G=Gold Plated	A=PA6T	0=PE Bag	
430=4.30mm		T=Tin Plated		1=Tape&Reel	
460=4.60mm		G2=Gold 2u"		2=Tube	
		G10=Gold 10u"		3=Tray	

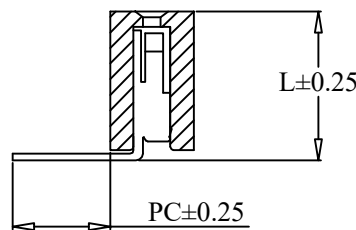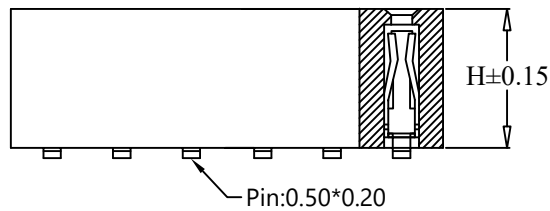

H	W	PC	L
4.00	2.40	2.80	4.30
4.30	2.40	2.80	4.60
4.60	2.40	2.80	4.90

SCONDAR ELECTRONIC LTD  
ENGINEER LIU APPROVED

OPERATION	DRAW	Lyao	2017.11.11
X.X ±0.35	DESIGN		
X.XX ±0.25			
X.XXX ±0.15	CHECK	Lisa	2017.11.13
Angle ± 3'			
DIM	TOL	APPROVE	

SCALE	-		SCONDAR ELECTRONIC LIMITED	
UNIT	mm			
SIZE	A4			
SHEET	1/1	PART NO.	FH200H430RT-1xxGA0301	
PROJ.	☯	TITLE:	FH2.0 HXX RT Gold flash PA6T 1xxP Female header	

AO	2021.05.06	NEW		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE