
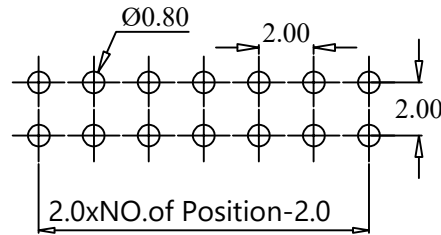


RoHS



受控

SPECIFICATION:

- Current Rating: 1.5Amps
 - Insulation Resistance: 1000MΩ Min
 - Contact Resistance: 20mΩ Max
 - Withstanding Voltage: 500VAC(1Min)
 - Max Processing Temp: 230°-260° for 30-60s
 - Operation Temperature: -40°C to +105°C
- Material:**
- Insulator (Housing): PA6T (UL94V-0)
 - Black Contacts: Brass

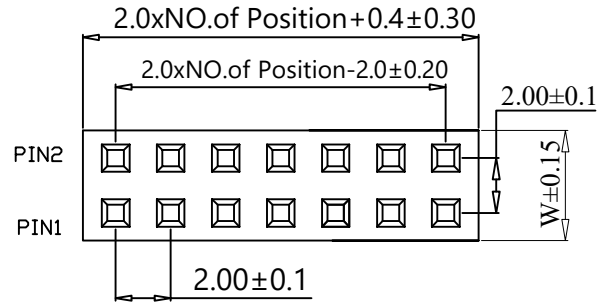

Recommended P.C.B Layout
 General Tolerance±0.05

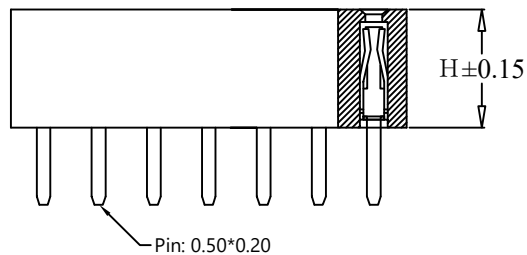

Ordering Information

FH200Hxxx ST-2xx Wxxx G A 0 301

Insulator height
 220=2.20mm
 400=4.00mm
 430=4.30mm
 460=4.60mm

No.of Pins
 220=2x20PIN
 400=4.00mm
 450=4.50mm

Plating
 G=Gold Plated
 T=Tin Plated
 G2=Gold 2u"
 G10=Gold 10u"

Material
 A=PA6T

Package
 0=PE Bag
 1=Tape&Reel
 2=Tube
 3=Tray

| H | W | PC | PIN |
|------|------|------|-----------|
| 2.20 | 4.00 | 2.50 | 0.50*0.20 |
| 4.00 | 4.00 | 2.80 | 0.50*0.20 |
| 4.00 | 4.50 | 2.80 | 0.50*0.20 |
| 4.30 | 4.00 | 2.80 | 0.50*0.20 |
| 4.30 | 4.50 | 2.80 | 0.50*0.20 |
| 4.60 | 4.00 | 2.80 | 0.50*0.20 |
| 4.60 | 4.50 | 2.80 | 0.50*0.20 |

| | | | | | | | | | | | | | | | | | |
|-----|--|-------------------------------|--|--------------------------|--|-------------|--|---------|--|------|--|------------|--|----------|--|---|--|
| | | SCONDAR ELECTRONIC LTD | | | | OPERATION | | DRAW | | Yang | | 2017.10.08 | | SCALE | | - | |
| | | ENGINEER LIU APPROVED | | | | X.X ±0.35 | | DESIGN | | | | | | UNIT | | mm | |
| | | | | | | X.XX ±0.25 | | | | | | | | SIZE | | A4 | |
| AO | | 2021.04.13 | | NEW | | X.XXX ±0.15 | | CHECK | | Lisa | | 2017.10.13 | | SHEET | | 1/1 | |
| REV | | DATE | | MODIFICATION DESCRIPTION | | Angle ± 3' | | APPROVE | | | | | | PROJ. | | TITLE: | |
| | | | | | | DIM TOL | | | | | | | | PART NO. | | FH200HxxxST-2xxW400GA0301 | |
| | | | | | | | | | | | | | | PROJECT | | FH2.0 ST Gold flash PA6T 2xxP Female header | |

