

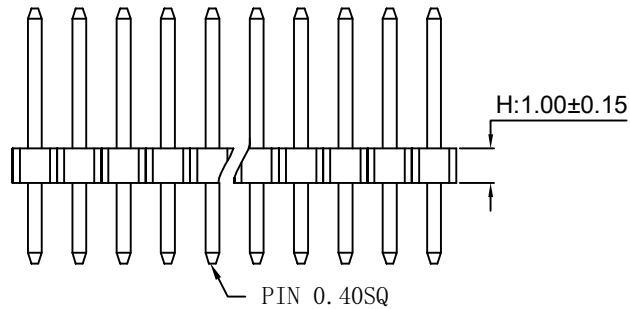
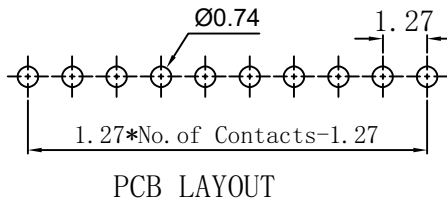


RoHS

受控

- SPECIFICATION:**
- Current Rating: 1A AC/DC
 - Contact resistance: 20mΩ(Max).
 - Insulation Resistance: 1000MΩ Min
 - Withstanding Voltage: 500VAC(1Min)
 - Operation Temperature: -40°C to +105°C
 - Max Processing Temp: 230°C-260°C for 30°C-60°C seconds
 - Material:
 - Insulator : Glass filled PA6T (UL94V-0), black
 - Contacts: Brass

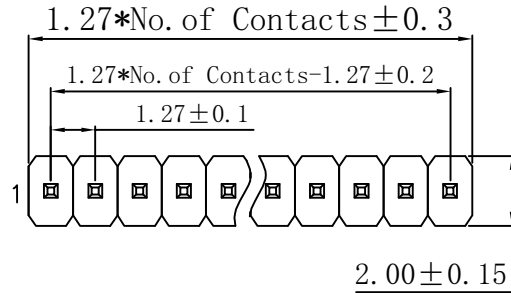

Ordering Information

PH127Hxxx ST- 1xx G A 0 301

- Insulator height: 100=1.00mm, 150=1.50mm, 200=2.00mm, 250=2.50mm
- No. of Pins: 120=1X20PIN
- Plating: G=Gold Plated, T=Tin Plated, G2=Gold 2u", G10=Gold 10u"
- Material: A=PA6T
- Package: 0=PE Bag, 1=Tape&Reel, 2=Tube, 3=Tray

Dimension antitheses list			
PA	PC	L	H
3.90	2.30	7.20	1.00
4.00	2.30	7.80	1.50
4.00	2.30	8.30	2.00
4.00	2.30	8.80	2.50

SCONDAR ELECTRONIC LTD
ENGINEER LJO APPROVED

AO	2021.5.08	NEW			OPERATION	Yao	2017.4.03	SCALE	-	<p>SCONDAR ELECTRONIC LIMITED</p>	
					X.X ±0.35	DESIGN	Lyao	2017.4.03	UNIT		mm
					X.XX ±0.25	CHECK	Lisa	2017.4.06	SIZE		A4
					X.XXX ±0.15	APPROVE			SHEET		1/1
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle DIM	± 3' TOL			PROJ.	PART NO.	PH127HxxxST-1xxGA0301
									TITLE:	PH1.27 ST H1.0 PA3.9 PC2.3 L7.2 Gold flash PA6T 1XXP Pin header	