


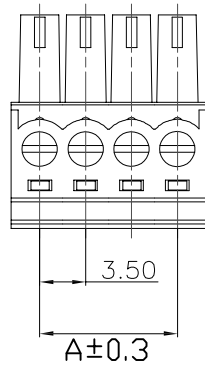

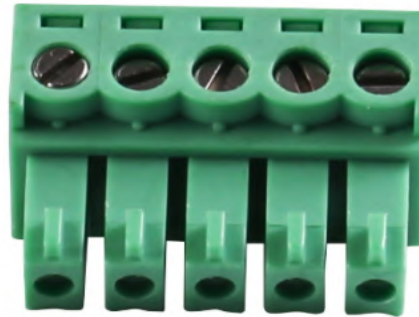


RoHS



NOTE 1:

UL Standard

1. Rated voltage/Rated current: 300V/8A

2. Withstanding Voltage: AC1600V/Min

3. Wire range: 28~16AWG

IEC Standard

1. Rated voltage/Rated current: 250V/7A

2. Wire range : 0.5~2.5mm²

NOTE 2:

1. Pitch: 3.5mm

2. Operating temperature: -40℃~+105℃

3. Stripping length: 6~7mm

4. RoHS Compliance

5. Rated torque: 4.43[Lb. in]

Ordering Information

SCT15EDGK - 3.50-XX B 4 650

Series NO. Pitch No.of Pins See Table Material B=PA66 V0 COLOUR
 1. Gray 2. Blue
 3. Black 4. Green
 5. Orange 6. Red
 7. Yellow 8. White
 9. Transparent

东莞市晟凯达电子科技有限公司
 工程专用章

受控

Dimensions		Part NO	PIN
A	B		
3.50	7.90	SCT15EDGK-3.50-02BGN650	2
7.00	11.40	SCT15EDGK-3.50-03BGN650	3
10.50	14.90	SCT15EDGK-3.50-04BGN650	4
14.00	18.40	SCT15EDGK-3.50-05BGN650	5

ITEM	NAMF OF PART	MATFRIAL	NOTFS	Pitch range in mm			Nominal dimension range in mm					Tolerance
				≤6	6~10	10~24	≤30	30~60	60~100	100~150	>150	
4	(Cage) 方盒	Copper alloy 铜合金	(Ni plated) 镀镍									0.1/10
3	(Contact) 触点	Copper alloy 铜合金	(Sn plated) 镀锡									0.1/10
2	(Screw) 螺丝 M3	Steel 钢	(Ni plated) 镀镍									0.1/10
1	(Housing) 塑件	PA66	UL94V-0									0.1/10

DRAW	Zhong	2020.08.02	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
DESIGN			UNIT	mm		
CHECK	Lisa	2020.08.02	SIZE	A4		
APPROVE	Allen	2020.08.02	SHEET	1/1	PART NO.	SCT15EDGK-3.50-XXB4650
			PROJ.	☯	TITLE:	/