



RoHS

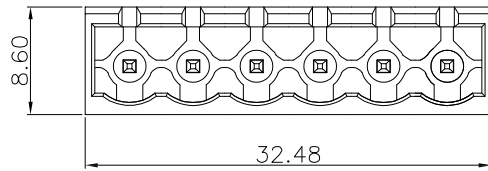

NOTE 1:

UL Standard

1. Rated voltage/Rated current: 300V/15A

2. Withstanding Voltage: AC1600V/Min
IEC Standard

1. Rated voltage/Rated current: 320V/20A



NOTE 2:

1. Pitch: 5.08mm

2. Operating temperature: -40°C ~ +105°C

3. RoHS Compliance.

4. Rated torque: 3.54 [Lb. in]

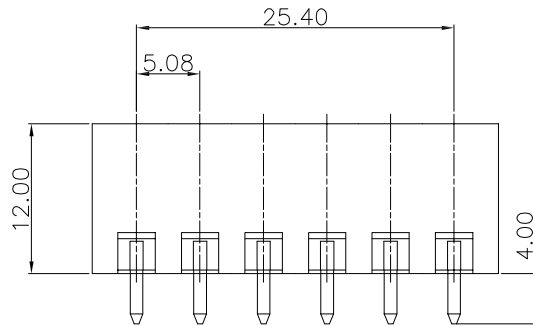


Ordering Information

SCT2EDGVC - 5.08-XX B 4 650

Series NO. Pitch No of Pins See Table Material B=PA66 V0 COLOUR
1. Gray 2. Blue 3. Black
4. Green 5. Orange 6. Red
7. Yellow 8. White
9. Transparent

Dimensions		Part NO	PIN
A	B		
5.08	12.16	SCTMX2EDGVC-5.08-02B4650	2
10.16	17.24	SCTMX2EDGVC-5.08-03B4650	3
15.24	22.32	SCTMX2EDGVC-5.08-04B4650	4
20.32	27.40	SCTMX2EDGVC-5.08-05B4650	5
25.40	32.48	SCTMX2EDGVC-5.08-06B4650	6
30.48	37.56	SCTMX2EDGVC-5.08-07B4650	7
35.56	42.64	SCTMX2EDGVC-5.08-08B4650	8
40.64	47.72	SCTMX2EDGVC-5.08-09B4650	9
45.72	52.80	SCTMX2EDGVC-5.08-10B4650	10
50.80	57.88	SCTMX2EDGVC-5.08-11B4650	11
55.88	62.96	SCTMX2EDGVC-5.08-12B4650	12
60.96	68.04	SCTMX2EDGVC-5.08-13B4650	13
66.04	73.12	SCTMX2EDGVC-5.08-14B4650	14
71.12	78.20	SCTMX2EDGVC-5.08-15B4650	15



PCB LAYOUT

东莞市晟凯达电子科技有限公司
工程专用章

受控

ITEM	NAMF OF PART	MATFRIAL	NOTFS	Pitch range in mm						Nominal dimension range in mm						
				≤6	6 ~ 10	10 ~ 24	≤30	30 ~ 60	60 ~ 100	100 ~ 150	> 150	0.1/10	0.1/10	0.1/10		
4				±0.15	±0.20	±0.30	±0.20	±0.30	±0.50	±0.70	±1.00	±1'				

DRAW	Zhong	2020.08.02	SCALE	-	 SCONDAR ELECTRONIC LIMITED
DESIGN			UNIT	mm	
CHECK	Lisa	2020.08.02	SIZE	A4	
APPROVE	Allen	2020.08.02	SHEET	1/1	
PART NO.		SCT2EDGVC-5.08-XXB4650		TITLE:	