



RoHS

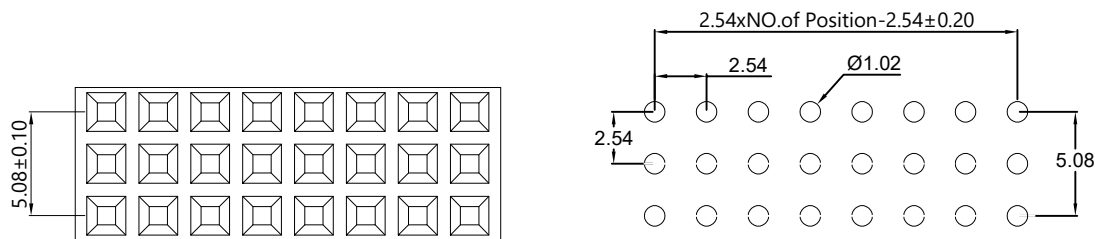

PCB LAYOUT

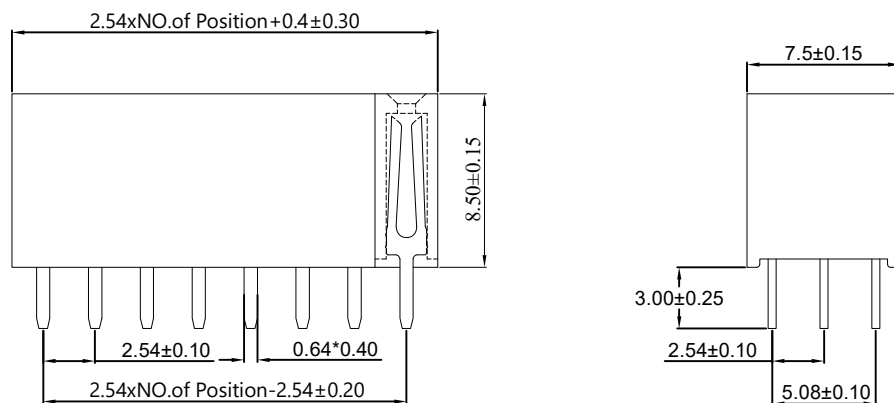

SPECIFICATION:

- Current Rating: 3Amps
- Insulation Resistance: 1000MΩ Min
- Contact Resistance: 20mΩ Max
- Withstanding Voltage: 500VAC(1Min)
- Max Processing Temp: 230°-260° for 30-60s
- Operation Temperature: -40°C to +105°C



Material:

- Insulator (Housing): PA6T (UL94V-0)
- Contacts: Brass
- Contact Plated: Gold Plated
Tin Plated

Ordering Information

FH254H850ST - 3 XX X A 3 301

No. of Pins 320=3x20
Plating S=Tin Plated G=Gold Plated
Material A=PA6T
Package 3=Tray

		SCONDAR ELECTRONIC LTD ENGINEER LIU APPROVED				OPERATION	DRAW	YaoQ	2021.04.12	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
						X.X	±0.35	DESIGN	LYao	2021.04.14	UNIT		mm
						X.XX	±0.25	CHECK	Lisa	2021.04.16	SIZE		A4
						X.XXX	±0.15	APPROVE			SHEET		1/1
A0	2010.03.06	NEW				Angle	± 3'				PART NO.	FH254H850ST-3xxxA3301	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL	APPROVE			PROJ.	 TITLE: FH2.54 H8.50 ST Gold flash PA6T 3xxP Female header	