



RoHS



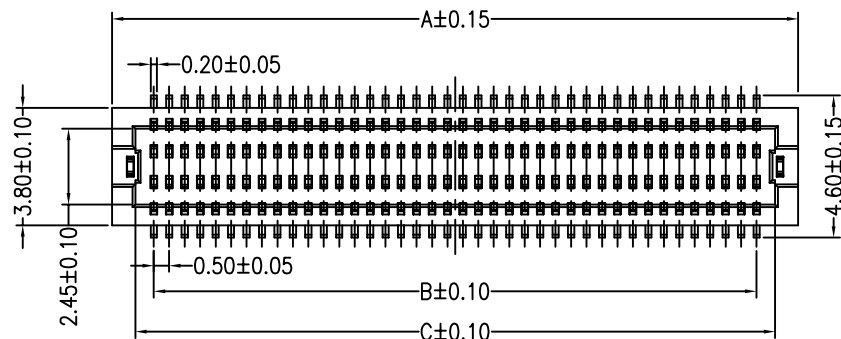


SPECIFICATIONS

- Current Rating:0.3A
- Voltage Rating:100V AC/DC
- Contact Resistance:50mΩ Max
- Withstanding Voltage:150V AC/Minute
- Temperature Range : -40℃ ~ +85℃
- Housing: LCP (UL94V-0) Beige
- Terminal:Phosphor Bronze
- Plating: Gold Plated

Ordering Information

50BTB	H340	FVSF	-	2xx	G	F	1	BE	185
Mated High H340=3.40mm	Model FVS=Female WV	No. of Pins 40=2X20P			Plating S=Tin Plated F=Gold Flash/Tin G=Gold	Material F=LCP	Package 0=PE Bag 1=Tape&Reel 2=Tube 3=Tray	Color BE=Beige	

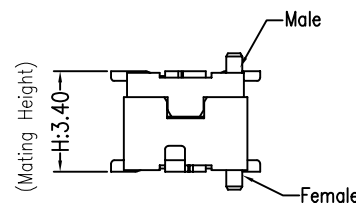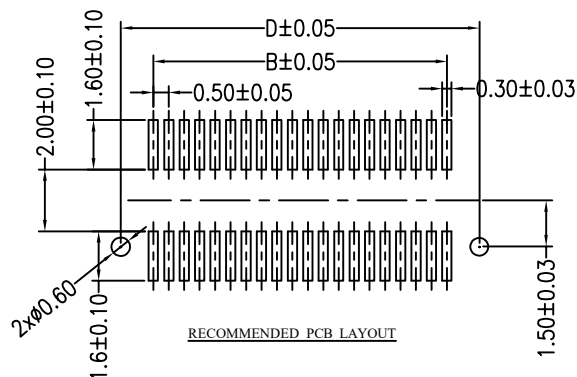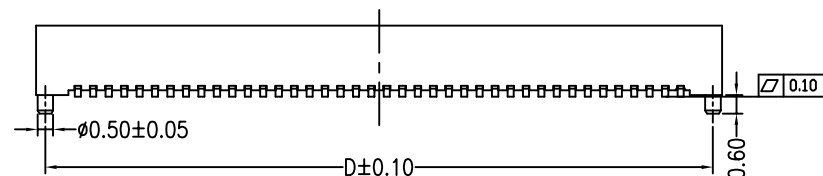

Combination Chart

PIN	Dimensions			
	A	B	C	D
10(2*5)	4.70	2.00	3.20	4.10
12(2*6)	5.20	2.50	3.70	4.60
14(2*7)	5.70	3.00	4.20	5.10
20(2*10)	7.20	4.50	5.70	6.60
22(2*11)	7.70	5.00	6.20	7.10
24(2*12)	8.20	5.50	6.70	7.60
30(2*15)	9.70	7.00	8.20	9.10
32(2*16)	10.20	7.50	8.70	9.60
36(2*18)	11.20	8.50	9.70	10.60
40(2*20)	12.20	9.50	10.70	11.60
50(2*25)	14.70	12.00	13.20	14.10
60(2*30)	17.20	14.50	15.70	16.60
80(2*40)	22.20	19.50	20.70	21.60

SCONDAR ELECTRONIC, LTD
ENGINEER 20241022

OPERATION		DRAW	Xiong	2017.11.02	SCALE	—			SCONDAR ELECTRONIC LIMITED
X.X	±0.35	DESIGN			UNIT	mm			
X.XX	±0.25				SIZE	A4			
X.XXX	±0.15	CHECK	Lisa	2017.11.02	SHEET	1/1			
Angle	± 3'	APPROVE			PART NO.	50BTBH340FVSF-2xxGF1BE185			
DIM	TOL				PROJ.		TITLE:	DF12 0.5mm Board to board H=3.4 Single card slot SMT 180° LCP Beige Female Socket Gold Plated 2xxPin With-pillar CAP Reel	