
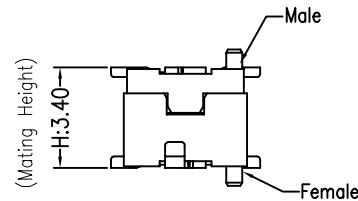
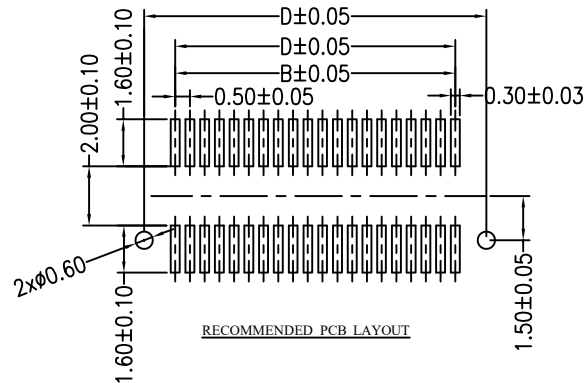


RoHS

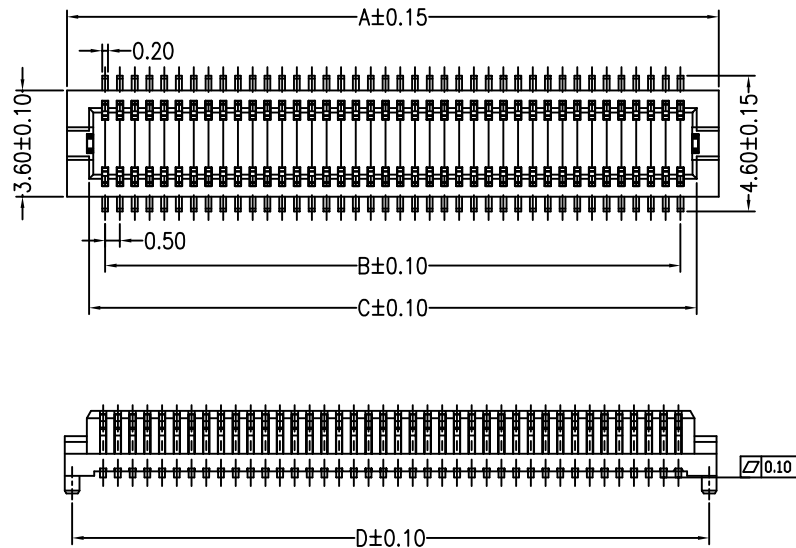

Combination Chart

SPECIFICATIONS

- Current Rating:0.3A
- Voltage Rating:100V AC/DC
- Contact Resistance:50mΩ Max
- Withstanding Voltage:150V AC/Minute
- Temperature Range : -40°C ~ +85°C
- Housing: LCP (UL94V-0) Beige
- Terminal:Phosphor Bronze
- Plating: Gold Plated

Ordering Information

50BTB	H340	MVSF	-	2xx	G	F	1	BE	185
Mated High H340=3.400mm		Model MVS=Male WV		No. of Pins 40=2X20P	Plating S=Tin Plated F=Gold Flash/Tin G=Gold	Material F=LCP	Package 0=PE Bag 1=Tap&Reel 2=Tube 3=Tray		Color BE=Beige

PIN	Dimensions			
	A	B	C	D
10(2*5)	4.60	2.00	3.10	4.10
12(2*6)	5.10	2.50	3.60	4.60
14(2*7)	5.60	3.00	4.10	5.10
20(2*10)	7.10	4.50	5.60	6.60
22(2*11)	7.60	5.00	6.10	7.10
24(2*12)	8.10	5.50	6.60	7.60
30(2*15)	9.60	7.00	8.10	9.10
32(2*16)	10.10	7.50	8.60	9.60
36(2*18)	11.10	8.50	9.60	10.60
40(2*20)	12.10	9.50	10.60	11.60
50(2*25)	14.60	12.00	13.10	14.10
60(2*30)	17.10	14.50	15.60	16.60
80(2*40)	22.10	19.50	20.60	21.60

SCONDAR ELECTRONIC,LTD
ENGINEER 20241022

OPERATION		DRAW	Xiong	2017.11.02	SCALE	—	 SCONDA SCONDA ELECTRONIC LIMITED	
X.X	±0.35	DESIGN			UNIT	mm		
X.XX	±0.25				SIZE	A4		
X.XXX	±0.15	CHECK	Lisa	2017.11.02	SHEET	1/1	PART NO.	50BTBH340MVSF—2xxGF1BE185
Angle	± 3'	APPROVE			PROJ.		TITLE:	DF12 0.5mm Board to board H=3.4 Single card slot SMT 180° LCP Beige Male Socket Gold Plated 2xPin With-pillar Reel
DIM	TOL							



SCONDAR ELECTRONIC LIMITED

DF12 0.5mm Board to board H=3.4 Single card slot SMT 180° LCP
Beige Male Socket Gold Plated 2xxPin With-pillar Reel