

RoHS

受控


Specifications:

- Current Rating: 0.3A
- Voltage Rating:30V AC/DC
- Contact Resistangce:90mΩ Max
- Insulation Resistance:50MΩ Min
- Withstanding Voltage:100V AC/Minute
- Temperature Range: -35℃ ~ +85℃
- Housing: LCP (UL94V-0) Black
- Terminal:Phosphor Bronze
- Plating: Gold Plated
- Operating Temperature:-55℃ ~ +125℃

Ordering Information

40BTB	Hxxx	MVS	-	2xx	G	F	1	BK	185
Mated High 100=1.00mm 200=2.00mm 250=2.50mm 300=3.00mm 350=3.50mm 400=4.00mm 600=6.00mm	Model MVS=Male WV	No. of Pins 40=2X20P	Plating S= Tin Plated F= Gold Flash/Tin G= Gold	Material F=LCP	Package 0=PE Bag 1=Tape&Reel 2=Tube 3=Tray	Color BK=Black			

Mating Height(H)	1.50	2.00	2.50	3.00	3.50	4.00	6.00
Male(H1)	1.14						
Female(H2)	1.45	1.95	2.40	2.90	3.40	3.90	5.90

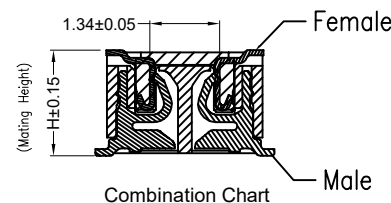

PIN	Dimensions		
	A	B	C
10(2*5)	3.52	1.60	1.00
12(2*6)	3.92	2.00	
20(2*10)	5.52	3.60	
24(2*12)	6.32	4.40	1.20
30(2*15)	7.52	5.60	1.50
34(2*17)	8.32	6.40	2.30
40(2*20)	9.52	7.60	3.20
44(2*22)	10.32	8.40	
50(2*25)	11.52	9.60	
60(2*30)	13.52	11.60	
70(2*35)	15.52	13.60	
80(2*40)	17.52	15.60	
90(2*45)	19.52	17.60	
100(2*50)	21.52	19.60	

SCONDAR ELECTRONIC, LTD
ENGINEER XJ2304

OPERATION	DRAW	Yao	2017.11.02	SCALE	-
X.X	±0.35	DESIGN	Xiong	2017.11.02	UNIT mm
X.XX	±0.25	CHECK	Lisa	2017.11.02	SIZE A4
X.XXX	±0.15	APPROVE		SHEET 1/1	PART NO.
Angle	± 3'			PROJ.	TITLE:
DIM	TOL				

SCONDAR

SCONDAR ELECTRONIC LIMITED

40BTBHxxxMVS-2xxGF1BK185

0.4mm Board to board H=xxx(Mating Height) Single card slot SMT
180° LCP Black Male Socket Gold Plated 2xxPin CAP Reel