


Weight: g/pcs

RoHS Compliant

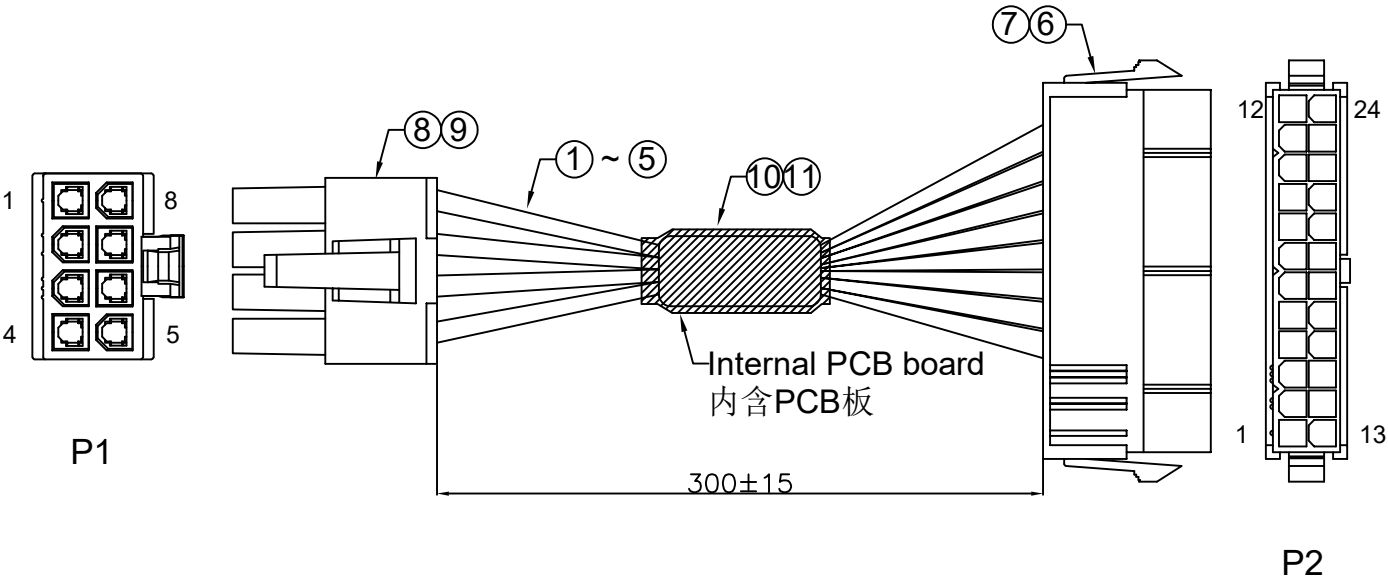

P2:1~7、12~15、20~24Pin:NC				
8	Yellow			11
7	Yellow			
6	Black			17
5	Green			16
4	Gray			8
2	Black			18
COLOR				
		+12V	Yellow	10
		+5Vsb	Purple	9
3	Black	GND	Black	19
1	Purple	+12Vsb		
P1	COLOR	PCB	COLOR	P2
PIN ASSIGNMENT				

⑪	HAB-OD1500	Heat Shrink Adhesive-Lined Tube OD:15.0mm,Color:Black	MM	60	
⑩	PCB	PCB:L:37.2mm*W:16.9mm	PCS	1	
⑨	SCT4201FTPS115H	MX4.2 Female Terminal For 4.20mm Pitch Housing, Phosphor Bronze Tin-Plated	PCS	8	
⑧	SCT4201MH-204BBK103	MX4.2 Pitch 4.2mm 2x4Pin Male Housing,Color:Black	PCS	1	
⑦	SCT4201MTPS115H	MX4.2 Male Terminal For 4.20mm Pitch Housing, Phosphor Bronze Tin-Plated	PCS	8	
⑥	SCT4201FH-212BBK103	MX4.2 Pitch 4.2mm 2x12Pin Female Housing,Color:Black	PCS	1	
⑤	UL100718TSGY201	UL1007 18AWG(34/0.178TS) Wire OD:2.1 Color:Gray	MM	315	
④	UL100718TSPU201	UL1007 18AWG(34/0.178TS) Wire OD:2.1 Color:Purple,L=140mm*2	MM	280	
③	UL100718TSGN201	UL1007 18AWG(34/0.178TS) Wire OD:2.1 Color:Green	MM	315	
②	UL100718TSYL201	UL1007 18AWG(34/0.178TS) Wire OD:2.1 Color:Yellow,L=315mm*2+150mm	MM	780	
①	UL100718TSBK201	UL1007 18AWG(34/0.178TS) Wire OD:2.1 Color:Black,L=315mm*2+140mm*2	MM	910	
No	PART NO	DESCRIPTION	UNIT	Q'TY	REMARK

SCONDAR ELECTRONIC LIMITED
ENGINEER YAO APPROVED

 SCONDAR ELECTRONIC LIMITED			
TOLERANCES: ±0.3mm		UNIT: mm	PAGE/ 1 of 1
SCT P/N	SCT-CPT001L300		Rev A
CUSTOMER P/N			
CUSTOMER			
TITLE: MX4.2 Pitch 4.2mm 2x4Pin Male Housing To MX4.2 Pitch 4.2mm 2x12Pin Female Housing L=300mm			

REVISIONS				DATE	2022.04.07
REV	DESCRIPTION	DATE	ECN NO.	DRAWN BY	Peng
A	INITIAL RELEASE			CHECKED BY	
B				APPROVED BY	
C					