


Weight: g/pcs

RoHS Compliant

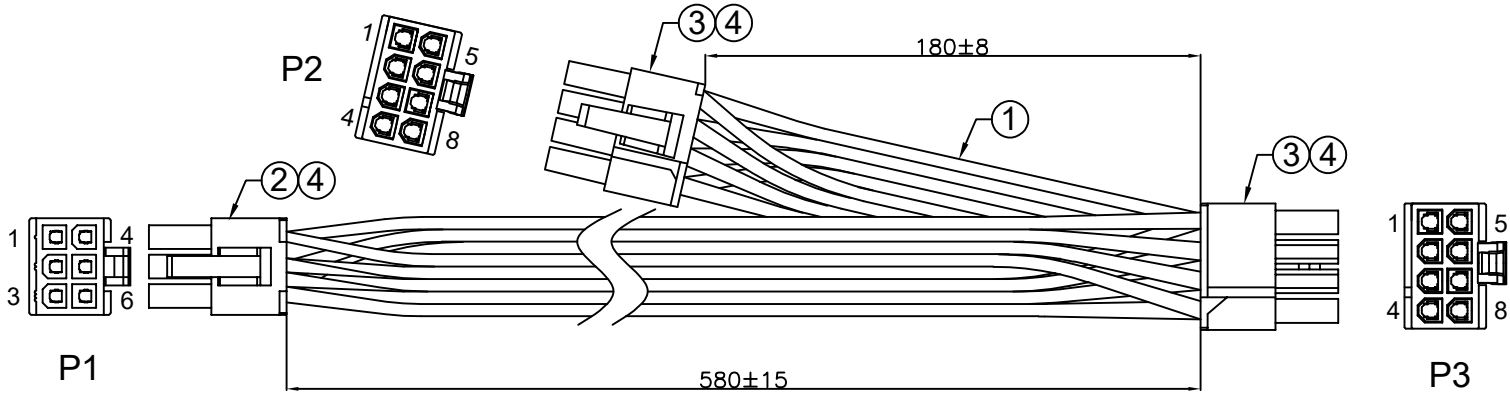

	8	Black	8
6		Black	
	7	Black	7
6		Black	
	6	Black	6
5		Black	
	5	Black	5
5		Black	
	4	Black	4
4		Black	
	3	Yellow	3
3		Yellow	
	2	Yellow	2
2		Yellow	
	1	Yellow	1
1		Yellow	
P1	P2	COLOR	P3
PIN ASSIGNMENT			

SCONDAR ELECTRONIC, LTD
ENGINEER APPROVED LYAO

④	SCT4201FTPS115H	MX4.2 Female Terminal For 4.20mm Pitch Housing, Phosphor Bronze Tin-Plated	PCS	22	
③	SCT4201MH	MX4.2 Pitch 4.2mm 2x3Pin+2Pin Male Housing,Color:Black	PCS	2	
②	SCT4201MH-203BBK103	MX4.2 Pitch 4.2mm 2x3Pin Male Housing,Color:Black	PCS	1	
①	R10070TS188C201	Ribbon Wire UL1007 18AWG(34/0.178TS)*8F(Yellow, Yellow, Yellow,Black, Black, Black, Black, Black)TS L=600mm+200mm	MM	800	
No	PART NO	DESCRIPTION	UNIT	Q'TY	REMARK

<div>SCONDAR</div> SCONDAR ELECTRONIC LIMITED			
TOLERANCES: ±0.3mm		UNIT:mm	PAGE/ 1 of 1
SCT P/N	SCT-CPT002L600+200	Rev A	
CUSTOMER P/N			
CUSTOMER			
TITLE: MX4.2 Pitch 4.2mm 2x3Pin Male HousingTo MX4.2 Pitch 4.2mm 2x3Pin+2Pin Male Housing*2 L=580mm			

REVISIONS				DATE	2022.04.11
REV	DESCRIPTION	DATE	ECN NO.	DRAWN BY	Peng
A	INITIAL RELEASE			CHECKED BY	
B				APPROVED BY	
C					

A

B

C

D

E

F

G

H