


Weight: g/pcs

RoHS Compliant

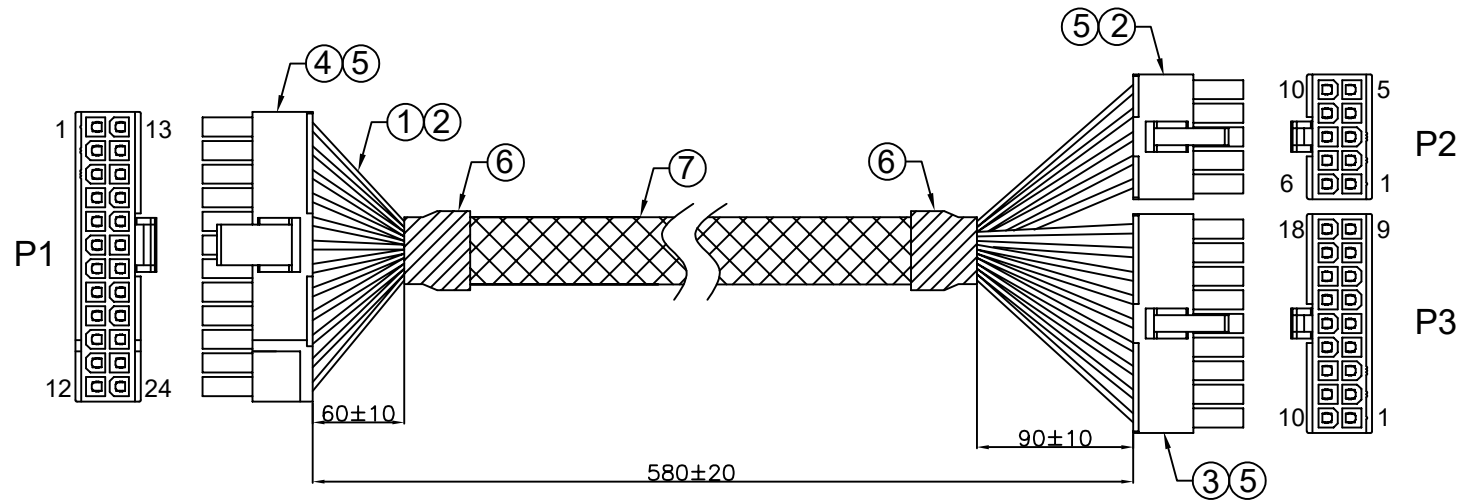

P1:20Pin:NC P3:9Pin: NC			
24	Black		14
23	Black	9	
22	Black	8	
21	Black		8
	Black	7	
19	Black		17
	Black		16
18	Black		12
17	Black	10	
16	Black		13
15	Black		15
14	Black		11
13	Black		10
	Black	6	
12	Black		1
11	Black	4	
10	Black		18
	Black	3	
9	Black	2	
8	Black	1	
7	Black		7
6	Black		6
5	Black		5
4	Black		4
3	Black		3
2	Black		2
1	Black	5	
P1	COLOR	P2	P3
PIN ASSIGNMENT			

⑦	HPB-OD1600	Plastic Braid OD:16.0mm Color:Black	MM	440	
⑥	HAB-OD191	Heat Shrink Adhesive-Lined Tube OD:19.1mm,Color:Black,L=25mm*2	MM	50	
⑤	SCT4201FTPS115H	MX4.2 Female Terminal For 4.20mm Pitch Housing, Phosphor Bronze Tin-Plated	PCS	51	
④	SCT4201MH-20+4BBK103	MX4.2 Pitch 4.2mm 2x10Pin+2x2Pin Male Housing,Color:Black	PCS	1	
5	③	SCT4201MH-209BBK103	MX4.2 Pitch 4.2mm 2x9Pin Male Housing,Color:Black	PCS	1
	②	SCT4201MH-205BBK103	MX4.2 Pitch 4.2mm 2x5Pin Male Housing,Color:Black	PCS	1
①	UL100718TSBK201	UL1007 18AWG(34x0.178TS) Wire OD:2.1mm Color:Black,L=600mm*27	MM	16200	
No	PART NO	DESCRIPTION	UNIT	Q'TY	REMARK

SCONDAR ELECTRONIC, LTD
ENGINEER APPROVED LIAO



SCONDAR ELECTRONIC LIMITED

TOLERANCES: ±0.3mm		 	UNIT: mm	PAGE/ 1 of 1
SCT P/N		SCT-CPT003L600		Rev A
CUSTOMER P/N				
CUSTOMER				
TITLE: MX4.2 Pitch 4.2mm 2x10Pin+2x2Pin Male Housing To MX4.2 Pitch 4.2mm 2x5Pin+2x9Pin Male Housing L=580mm				

REVISIONS				DATE		2022.04.27	
REV	DESCRIPTION	DATE	ECN NO.	DRAWN BY		Peng	
6	A	INITIAL RELEASE		CHECKED BY		LYao	
	B			APPROVED BY			
	C						

A B C D E F G H