


Weight: g/pcs

RoHS Compliant

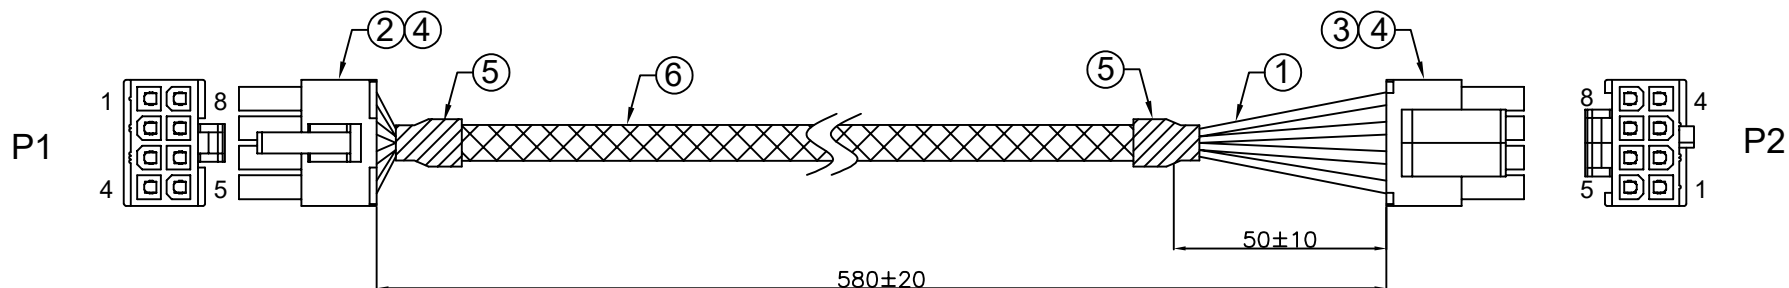

5	Black	2
6	Black	4
7	Black	1
8	Black	3
4	Black	7
3	Black	8
2	Black	5
1	Black	6
P1	COLOR	P2
PIN ASSIGNMENT		

SCONDAR ELECTRONIC, LTD
ENGINEER APPROVED LYAO

⑥	HPB-OD900	Plastic Braid OD:9.0mm Color:Black	MM	520	
⑤	HAB-OD790	Heat Shrink Adhesive-Lined Tube OD:7.9mm,Color:Black,L=25mm*2	MM	50	
④	SCT4201FTPS115H	MX4.2 Female Terminal For 4.20mm Pitch Housing, Phosphor Bronze Tin-Plated	PCS	16	
③	SCT4201MH-4+4BBK103	MX4.2 Pitch 4.2mm 2x2Pin+2x2Pin Male Housing,Color:Black	PCS	1	
②	SCT4201MH-204BBK103	MX4.2 Pitch 4.2mm 2x4Pin Male Housing,Color:Black	PCS	1	
①	UL100718TSBK201	UL1007 18AWG(34x0.178TS) Wire OD:2.1mm Color:Black,L=600mm*8	MM	4800	
No	PART NO	DESCRIPTION	UNIT	Q'TY	REMARK



SCONDAR ELECTRONIC LIMITED

TOLERANCES: $\pm 0.3\text{mm}$		UNIT: mm	PAGE/ 1 of 1
SCT P/N	SCT-CPT004L580	Rev A	
CUSTOMER P/N			
CUSTOMER			
TITLE: MX4.2 Pitch 4.2mm 2x4Pin Male Housing To MX4.2 Pitch 4.2mm 2x2Pin+2x2Pin Male Housing L=580mm			

REVISIONS

REV	DESCRIPTION	DATE	ECN NO.
A	INITIAL RELEASE		
B			
C			

DATE

2022.04.11

DRAWN BY

Peng

CHECKED BY

LYao

APPROVED BY

A

B

C

D

E

F

G

H