


Weight: g/pcs

RoHS Compliant

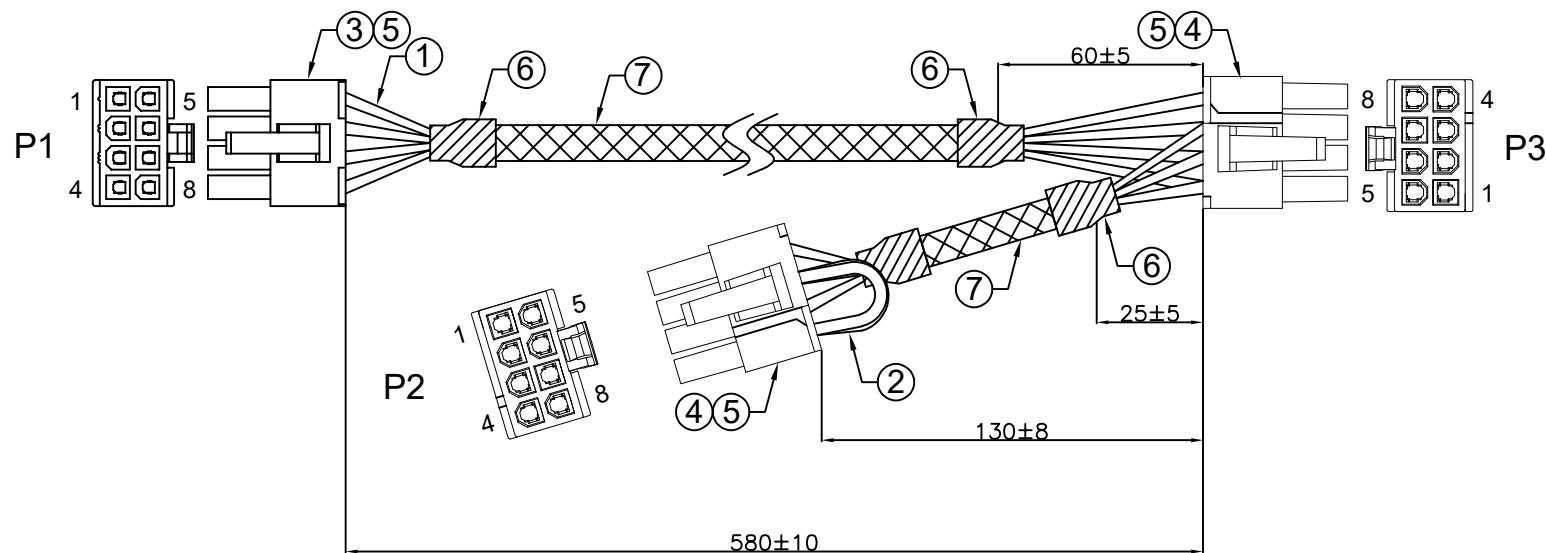

P1:1Pin: NC			
8		Black	8
		Black	4
	8	Black(20AWG)	
	6	Black	6
7		Black	
	4	Black(20AWG)	
	7	Black	7
6		Black	
	5	Black	5
5		Black	
	1	Black	2
3		Black	
	2	Black	3
2		Black	
	3	Black	1
1		Black	
P1	P2	COLOR	P3
PIN ASSIGNMENT			

⑦	HPB-OD900	Plastic Braid OD:9.0mm Color:Black,L=525mm+90mm	MM	615	
⑥	HAB-OD790	Heat Shrink Adhesive-Lined Tube OD:7.9mm,Color:Black,L=25mm*4	MM	100	
⑤	SCT4201FTPS115H	MX4.2 Female Terminal For 4.20mm Pitch Housing, Phosphor Bronze Tin-Plated	PCS	23	
④	SCT4201MH-6+2BBK103	MX4.2 Pitch 4.2mm 2x3Pin+2Pin Male Housing,Color:Black	PCS	2	
③	SCT4201MH-204BBK103	MX4.2 Pitch 4.2mm 2x4Pin Male Housing,Color:Black	PCS	1	
②	UL100720TSBK201	UL1007 20AWG(21x0.178TS) Wire OD:1.8mm Color:Yellow,L=80mm*2	MM	160	
①	UL100718TSBK201	UL1007 18AWG(34x0.178TS) Wire OD:2.1mm Color:Black,L=600mm*8+150mm*6	MM	5700	
No	PART NO	DESCRIPTION	UNIT	Q'TY	REMARK

SCONDAR ELECTRONIC, LTD
ENGINEER APPROVED LIAO



SCONDAR ELECTRONIC LIMITED

TOLERANCES: ±0.3mm		UNIT: mm	PAGE/ 1 of 1
SCT P/N	SCT-CPT005L600+150	Rev A	
CUSTOMER P/N			
CUSTOMER			
TITLE: MX4.2 Pitch 4.2mm 2x4Pin Male Housing To MX4.2 Pitch 4.2mm 2x3Pin+2Pin Male Housing L=580mm			

REVISIONS

REV	DESCRIPTION	DATE	ECN NO.
A	INITIAL RELEASE		
B			
C			

DATE

2022.04.11

DRAWN BY

Peng

CHECKED BY

LYao

APPROVED BY

A

B

C

D

E

F

G

H