


Weight: g/pcs


RoHS Compliant

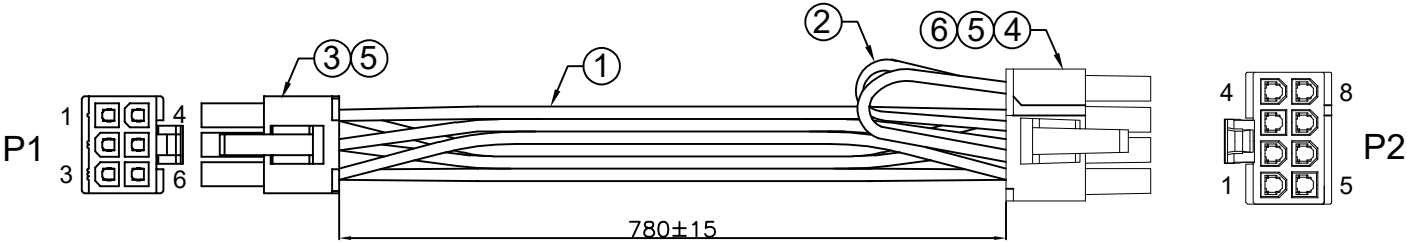

6		Black	5
	8	Black	6
5		Black	
	4	Black	7
4		Black	
3		Yellow	3
2		Yellow	2
1		Yellow	1
P1	P2	COLOR	P2
PIN ASSIGNMENT			

SCONDAR ELECTRONIC, LTD
ENGINEER APPROVED LIAO

⑥	SCT4201FTBS103	MX4.2 Brass Tin-Plated Low-Foot For Small Wire Female Terminal	PCS	2	
⑤	SCT4201FTPS115H	MX4.2 Female Terminal For 4.20mm Pitch Housing, Phosphor Bronze Tin-Plated	PCS	12	
④	SCT4201MH-6+2BBK173	MX4.2 Pitch 4.2mm 2x3Pin+2Pin Male Housing,Color:Black	PCS	1	
③	SCT4201MH-203BBK173	MX4.2 Pitch 4.2mm 2x3Pin Male Housing,Color:Black	PCS	1	
②	UL100720TSBK201	UL1007 20AWG(21x0.178TS) Wire OD:1.8mm Color:Black,L=80mm*2	MM	160	
①	R10070TS186C201	Ribbon Wire UL1007 18AWG(34/0.178TS)*6F(Black, Black, Black, Yellow, Yellow, Yellow)TS	MM	800	
No	PART NO	DESCRIPTION	UNIT	Q'TY	REMARK

<div>SCONDAR</div> <div>SCONDAR ELECTRONIC LIMITED</div>			
TOLERANCES: ±0.3mm		UNIT: mm	PAGE/ 1 of 1
SCT P/N	SCT-CPT008L800	Rev	
		A	
CUSTOMER P/N			
CUSTOMER			
TITLE: MX4.2 Pitch 4.2mm 2x3Pin Male HousingTo MX4.2 Pitch 4.2mm 2x3Pin+2Pin Male Housing L=780mm			

REVISIONS				DATE	2022.04.08
REV	DESCRIPTION	DATE	ECN NO.	DRAWN BY	Peng
A	INITIAL RELEASE			CHECKED BY	
B				APPROVED BY	
C					

A

B

C

D

E

F

G

H