


Weight: g/pcs

RoHS Compliant

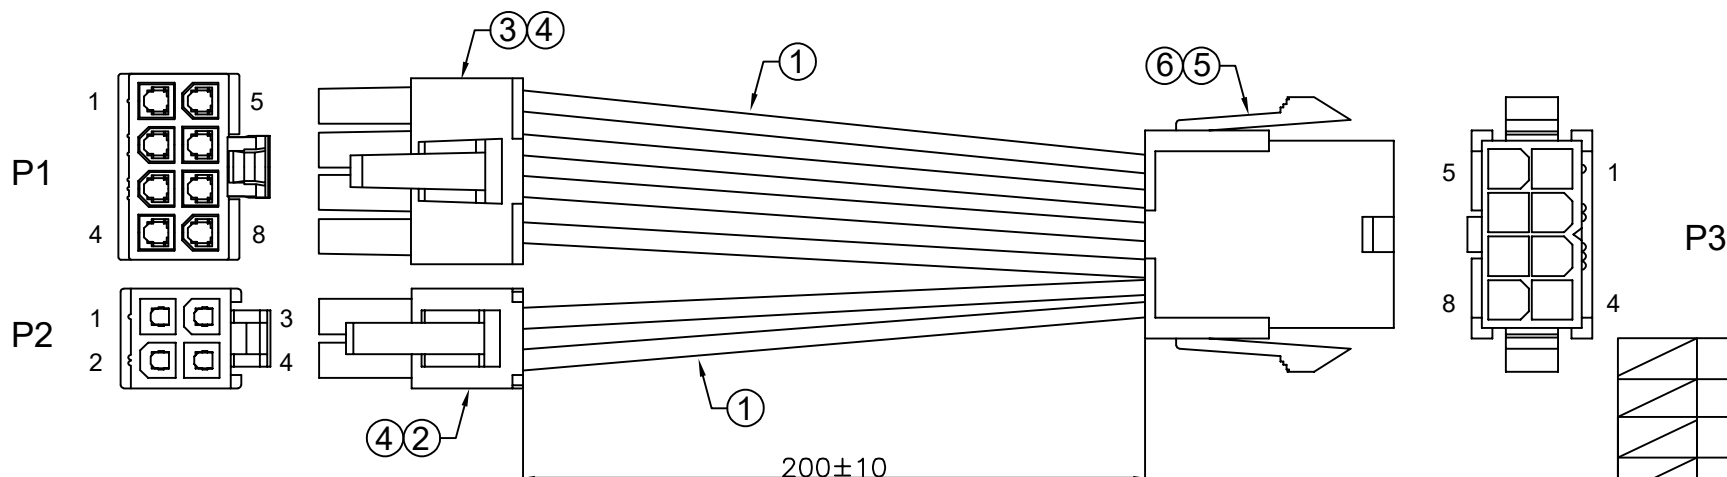

	4	Black	8
	3	Black	7
	2	Black	4
	1	Black	3
8		Black	6
7		Black	
6		Black	5
5		Black	
4		Black	2
3		Black	
2		Black	1
1		Black	
P1	P2	COLOR	P3
PIN ASSIGNMENT			

SCONDAR ELECTRONIC, LTD  
ENGINEER APPROVED LYAO

⑥	SCT4201MTPS115H	MX4.2 Male Terminal For 4.20mm Pitch Housing, Phosphor Bronze Tin-Plated	PCS	8	
⑤	SCT4201FH-204BBK103	MX4.2 Pitch 4.2mm 2x4Pin Female Housing,Color:Black	PCS	1	
④	SCT4201FTPS115H	MX4.2 Female Terminal For 4.20mm Pitch Housing, Phosphor Bronze Tin-Plated	PCS	8	
③	SCT4201MH-204BBK103	MX4.2 Pitch 4.2mm 2x4Pin Male Housing,Color:Black	PCS	1	
②	SCT4201MH-202BBK103	MX4.2 Pitch 4.2mm 2x2Pin Male Housing,Color:Black	PCS	1	
①	UL100718TSBK201	UL1007 18AWG(34/0.178TS) Wire OD:2.1 Color:Black,L=215mm*12	MM	2580	
No	PART NO	DESCRIPTION	UNIT	Q'TY	REMARK



SCONDAR ELECTRONIC LIMITED

TOLERANCES: ±0.3mm		UNIT:mm	PAGE/ 1 of 1
SCT P/N	SCT-CPT016L200	Rev A	
CUSTOMER P/N			
CUSTOMER			
TITLE: MX4.2 Pitch 4.2mm 2x4Pin Male Housing+MX4.2 Pitch 4.2mm 2x2Pin Male Housing To MX4.2 Pitch 4.2mm 2x4Pin Female Housing L=200mm			

### REVISIONS

REV	DESCRIPTION	DATE	ECN NO.
A	INITIAL RELEASE		
B			
C			

DATE

2022.04.07

DRAWN BY

Peng

CHECKED BY

LYao

APPROVED BY