


Weight: g/pcs

RoHS Compliant

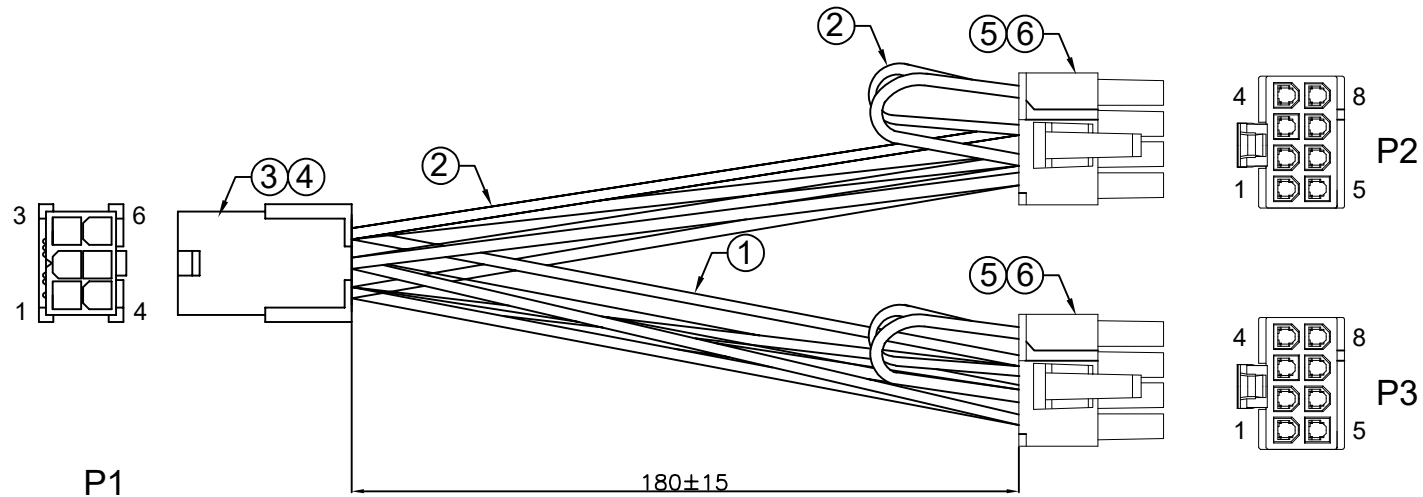

6	Black		7-4
	Black	6	6-8
5	Black		5
	Black	5	
4	Black	7-4	
	Black	6-8	
3	Yellow		3
	Yellow	3	
2	Yellow		2
	Yellow	2	
1	Yellow		1
	Yellow	1	
P1	COLOR	P2	P3
PIN ASSIGNMENT			

SCONDAR ELECTRONIC, LTD
ENGINEER APPROVED LIAO

⑥	SCT4201FTPS115H	MX4.2 Female Terminal For 4.20mm Pitch Housing, Phosphor Bronze Tin-Plated	PCS	16	
⑤	SCT4201MH6+2BBK103	MX4.2 Pitch 4.2mm 2x3+2Pin Female Housing,Color:Black	PCS	2	
④	SCT4201MTPS115H	MX4.2 Male Terminal For 4.20mm Pitch Housing, Phosphor Bronze Tin-Plated	PCS	6	
③	SCT4201FHA-203BBK103	MX4.2 Pitch 4.2mm 2x4Pin Male Housing,Color:Black	PCS	1	
②	UL100718TSYL201	UL1007 18AWG(34x0.178TS) Wire OD:2.1mm Color:Yellow,L=200mm*6	MM	1200	
①	UL100718TSBK201	UL1007 18AWG(34x0.178TS) Wire OD:2.1mm Color:Black,L=200mm*6+50mm*4	MM	1400	
Nq	PART NO	DESCRIPTION	UNIT	Q'TY	REMARK



SCONDAR ELECTRONIC LIMITED

TOLERANCES: ±0.3mm		UNIT:mm	PAGE/ 1 of 1
SCT P/N	SCT-CPT017L180	Rev A	
CUSTOMER P/N			
CUSTOMER			
TITLE: MX4.2 Pitch 4.2mm 2x3Pin Female HousingTo MX4.2 Pitch 4.2mm 2x3Pin+2Pin Male Housing L=180mm			

REVISIONS

REV	DESCRIPTION	DATE	ECN NO.	DATE	DRAWN BY	CHECKED BY	APPROVED BY
A	INITIAL RELEASE			2022.04.08	Peng		
B							
C							