


Weight: g/pcs

RoHS Compliant

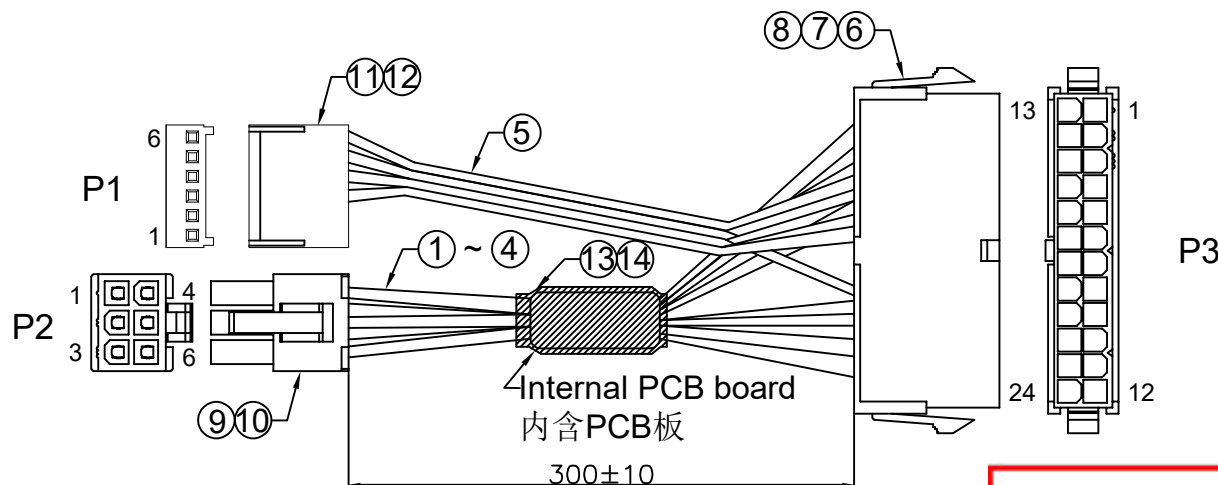

P1:1、2Pin:NC		
6	Red	16
5	White	8
4	Green	17
3	Brown	18
P1	COLOR	P2
PIN ASSIGNMENT		

P2:1,2,4,6,7,1213,15,19~24Pin:NC				
5	Yellow			11
4	Yellow			
3	Green			14
2	Black			3
COLOR				
		+12V	Yellow	10
		+5Vsb	Purple	9
6	Purple	+12Vsb		
1	Black	GND	Black	5
P2	COLOR	PCB	COLOR	P2
PIN ASSIGNMENT				

14	HAB-OD1500	Heat Shrink Adhesive-Lined Tube OD:15.0mm,Color:Black	MM	60	
13	PCB	PCB:L:37.2mm*W:16.9mm	PCS	1	
12	SCT2541FTPS109	MX2.54 Female Terminal For 2.54mm Pitch Housing, Phosphor Bronze Tin-Plated	PCS	4	
11	SCT2541MH-06CBE109	MX2.54 Pitch 2.54mm 6Pin Male Housing,Color:Beige	PCS	1	
10	SCT4201FTPS115H	MX4.2 Female Terminal For 4.20mm Pitch Housing, Phosphor Bronze Tin-Plated	PCS	6	
9	SCT4201MH-203BBK103	MX4.2 Pitch 4.2mm 2x3Pin Male Housing,Color:Black	PCS	1	
8	SCT4201MTBS103L	MX4.2 Male Terminal,Phosphor Bronze Tin-Plated low-Foot For Small Wire	PCS	4	
7	SCT4201MTPS115H	MX4.2 Male Terminal For 4.20mm Pitch Housing, Phosphor Bronze Tin-Plated	PCS	6	
6	SCT4201FH-212BBK103	MX4.2 Pitch 4.2mm 2x12Pin Female Housing,Color:Black	PCS	1	
5	R10070TS264C201	Ribbon Wire UL1007 26AWG(7/0.16TS)*4C(Red,White,Green,Brown)TS	MM	320	
4	UL100718TSPU201	UL1007 18AWG(34/0.178TS) Wire OD:2.1 Color:Purple,L=140mm*2	MM	280	
3	UL100718TSGN201	UL1007 18AWG(34/0.178TS) Wire OD:2.1 Color:Green	MM	320	
2	UL100718TSYL201	UL1007 18AWG(34/0.178TS) Wire OD:2.1 Color:Yellow,L=320mm*2+150mm	MM	790	
1	UL100718TSBK201	UL1007 18AWG(34/0.178TS) Wire OD:2.1 Color:Black,L=320mm+140mm*2	MM	600	
No	PART NO	DESCRIPTION	UNIT	Q'TY	REMARK

深圳市森康达电子有限公司
工程专用章

受控



SCONDAR ELECTRONIC LIMITED

TOLERANCES: ±0.3mm		UNIT: mm	PAGE/ 1 of 1
SCT P/N	SCT-CPT018L300		Rev A
CUSTOMER P/N			
CUSTOMER			
TITLE: MX2.54 Pitch 2.54mm 6Pin Male Housing+MX4.2 Pitch 4.2mm 2x3Pin Male Housing To MX4.2 Pitch 4.2mm 2x12Pin Female Housing L=300mm			

REVISIONS

REV	DESCRIPTION	DATE	ECN NO.	DATE	2022.04.08	SCT P/N	SCT-CPT018L300	Rev A
A	INITIAL RELEASE			DRAWN BY	Peng	CUSTOMER P/N		
B				CHECKED BY		CUSTOMER		
C				APPROVED BY		TITLE: MX2.54 Pitch 2.54mm 6Pin Male Housing+MX4.2 Pitch 4.2mm 2x3Pin Male Housing To MX4.2 Pitch 4.2mm 2x12Pin Female Housing L=300mm		

A B C D E F G H