


Weight: g/pcs

RoHS Compliant

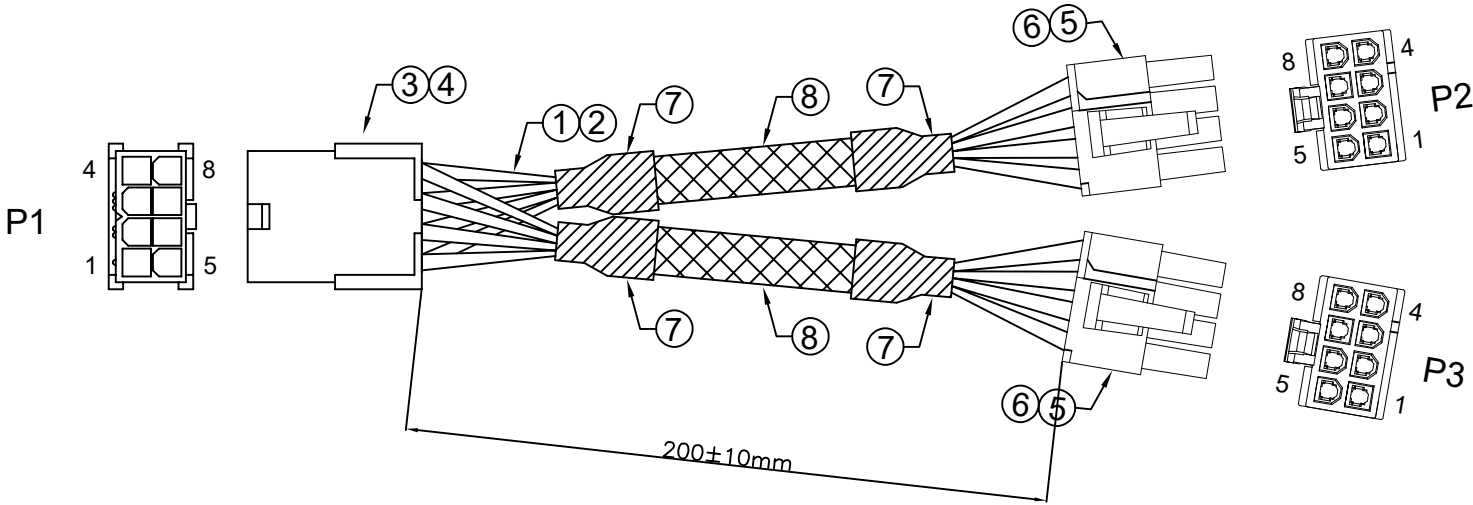

8	Black		8
	Black	8	
7	Black		7
	Black	7	
6	Black		6
	Black	6	
5	Black		5
	Black	5	
4	Black		4
	Black	4	
3	Yellow		3
	Yellow	3	
2	Yellow		2
	Yellow	2	
1	Yellow		1
	Yellow	1	
P1	COLOR	P2	P3
PIN ASSIGNMENT			

⑧	HPB-OD900	Plastic Braid OD:9.0mm Color:Black, L=110mm*2	MM	220	
⑦	HAB-OD790	Heat Shrink Adhesive-Lined Tube OD:7.9mm,Color:Black,L=25mm*4	MM	100	
⑥	SCT4201FTPS115H	MX4.2 Female Terminal For 4.20mm Pitch Housing, Phosphor Bronze Tin-Plated	PCS	16	
⑤	SCT4201MH6+2BBK103	MX4.2 Pitch 4.2mm 2x3+2Pin Female Housing,Color:Black	PCS	2	
④	SCT4201MTPS115H	MX4.2 Male Terminal For 4.20mm Pitch Housing, Phosphor Bronze Tin-Plated	PCS	8	
③	SCT4201FHA-204BBK103	MX4.2 Pitch 4.2mm 2x4Pin Male Housing,Color:Black	PCS	1	
②	UL100718TSYL201	UL1007 18AWG(34x0.178TS) Wire OD:2.1mm Color:Yellow,L=200mm*6	MM	1200	
①	UL100718TSBK201	UL1007 18AWG(34x0.178TS) Wire OD:2.1mm Color:Black,L=200mm*10	MM	2000	
No	PART NO	DESCRIPTION	UNIT	Q'TY	REMARK

SCONDAR ELECTRONIC, LTD  
ENGINEER APPROVED LYAO

<div>SCONDAR</div> SCONDAR ELECTRONIC LIMITED			
TOLERANCES: ±0.3mm		UNIT:mm	PAGE/ 1 of 1
SCT P/N	SCT-CPT019L200	Rev A	
CUSTOMER P/N			
CUSTOMER			
TITLE: MX4.2 Pitch 4.2mm 2x4Pin Male Housing To MX4.2 Pitch 4.2mm 2x3Pin+2Pin Male Housing*2 L=180mm			

REVISIONS				DATE	2023.06.05
REV	DESCRIPTION	DATE	ECN NO.	DRAWN BY	Zhong
A	INITIAL RELEASE			CHECKED BY	LYao
B				APPROVED BY	
C					

A

B

C

D

E

F

G

H