



Weight: g/pcs

RoHS Compliant

受控

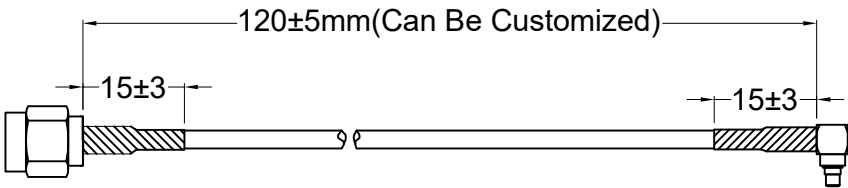

电气性能 Electrical performance	
适用频段 / Applicable frequency band	0~6G
输入阻抗 / Input Impedance	50Ω
驻波比 / V.S.W.R	≤1.5
增益 / Gain(Peak)	-
功率 / Admitted Power	-
电压 / Voltage	-
物料特性 Physical Properties	
固定方式 / Mounting	螺纹对接 Thread docking
连接器 / Connector	SMA Inner Hole(内孔)
连接器 / Connector	90° MMCX
电缆类型 / Cable Type	GR316 同轴线 GR316 Coaxial Cable
天线颜色 / Antenna Color	银白色 Silvery White





SCONDAR ELECTRONIC LIMITED

TOLERANCES: ±0.3mm



UNIT: mm

PAGE/
1 of 1

SCT P/N

RF0006

Rev
A

CUSTOMER P/N

CUSTOMER

TITLE: SMA-90° MMCX Extension Cord L:120mm(Can Be Customized)
(SMA Inner Hole)

RF Wire Harness

REVISIONS				DATE	2025.11.29
REV	DESCRIPTION	DATE	ECN NO.	DRAWN BY	Yao
A	INITIAL RELEASE	2025.11.29		CHECKED BY	Xiong
		SCONDAR ELECTRONIC, LTD ENGINEER		APPROVED BY	Lisa