


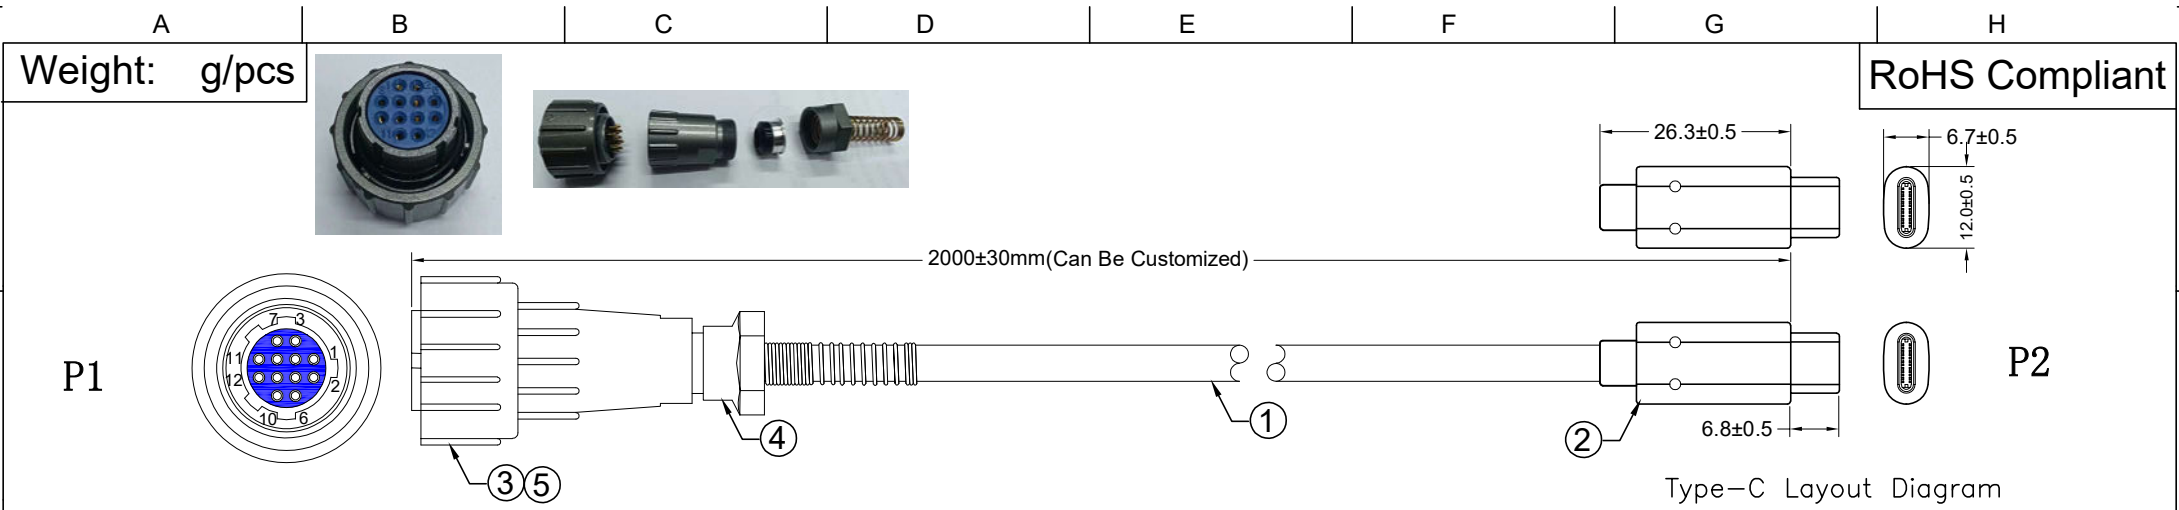

PIN ASSIGNMENT		
P1	Color	P2
4	Red	+5V
5	Black	GND
6	Green	D+
7	White	D-

5	HTB-ID200	Heat Shrink Tube Ø:2.0mm Color:Black L:10mm*4PCS	MM	40	
4	HTB-ID640-BK-glue	Dual Wall Heat Shrinkable tubing Ø:6.4mm black	MM	25	
3	SCTFQ18-12PTK60X513	FQ18 12Pin Waterproof Plug, Outlet aperture ø6.0mm,Black Rubber dust cover	PCS	1	
2	External mold	PVC 45P Black	G	-	
	Internal Mold	HD-PE Transparent	G	-	
	Type-C Plug	Type-C Plug 24Pin Data OTG ,With PCB board, RP=5.1K(±5%),C1=10NF/Empty(Can Be Customized)	PCS	1	
1	Cable	2725 28AWG/1P+24AWG/2C+AL+B(48/0.10TCCS) OD:4.5mm(Can Be Customized)	MM	1995	
NO	PART NO	DESCRIPTION	UNIT	Q'TY	REMARK

SCONDAR SCONDAR ELECTRONIC LIMITED			
TOLERANCES: ±0.3mm	 	UNIT: mm	PAGE/ 1 of 1
SCT P/N	W0005	Rev	
		A	
CUSTOMER P/N			
CUSTOMER	Waterproof Wire Harness		
TITLE: FQ18 12Pin Waterproof Plug to Type-C L=2000mm(Can Be Customized)			

REVISIONS				DATE	2025.06.03
REV	DESCRIPTION	DATE	ECN NO.	DRAWN BY	Yao
A	INITIAL RELEASE	2025.06.03		CHECKED BY	Xiong
				APPROVED BY	Lisa

SCONDAR ELECTRONIC, LTD
ENGINEER 2506