

A

B

C

D

E

F


G

H

Weight: g/pcs

RoHS Compliant

受控

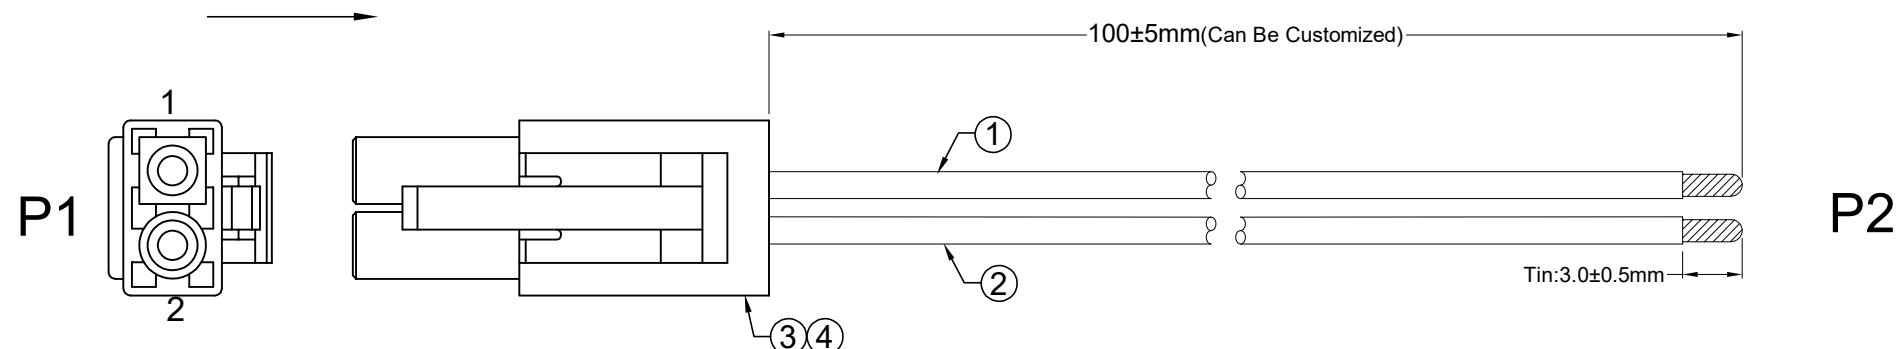

Technical requirements:  
 -100% testing of the product.  
 -Compliant with ROHS requirements.  
 -Tensile Strength Standard Compliant with UL486A

## PIN ASSIGNMENT

P1	Color	P2
1	Red	Tin
2	Black	Tin

4	SCT4500MH-02CGN109	EL4.5mm PA66 V2 Green 02Pin Male housing	PCS	1	
3	SCT4500FTSAPS169	EL4.5mm Phosphor Bronze Tin Plated Ultra High foot Female Terminal 18-22AWG	PCS	2	
5	2 NOUL16TSBKS205	NO-UL 16AWG(252/0.08TS),OD:3.0mm Silicone Wire 200°C 600V,Color:Black	MM	105	
1	1 NOUL16TSRDSR205	NO-UL 16AWG(252/0.08TS),OD:3.0mm Silicone Wire 200°C 600V,Color:Red	MM	105	
NO	PART NO	DESCRIPTION	UNIT	Q'TY	REMARK

SCONDAR

SCONDAR ELECTRONIC LIMITED

TOLERANCES: ±0.3mm UNIT: mm PAGE/ 1 of 1

Rev  
A

REVISIONS				DATE	2026.01.05		SCT P/N	D0009		
REV	DESCRIPTION	DATE	ECN NO.	DRAWN BY	Yao		CUSTOMER P/N			
6	A INITIAL RELEASE	2026.01.05		CHECKED BY	Xiong		CUSTOMER	Drone Wire Harness		
				APPROVED BY	Lisa		TITLE: Drone wiring harness/model aircraft battery electrical adjustment connection wire/EL4.50mm 2P Male Housing L=100mm (Can Be Customized)			
				SCONDAR ELECTRONIC, LTD						
				ENGINEER						

A B C D E F G H