


A B C D E F G H

Weight: g/pcs

RoHS Compliant

受控

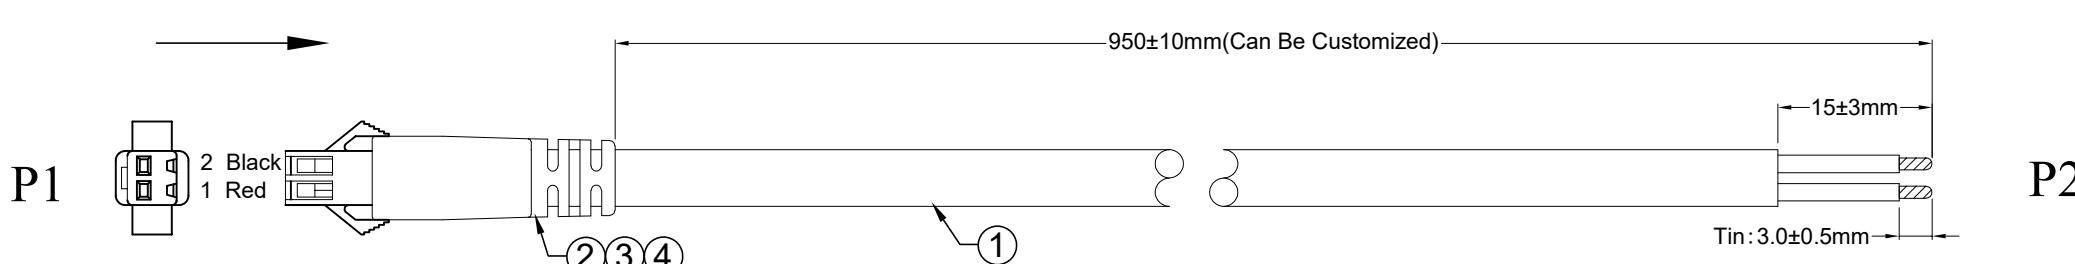

Technical requirements:

- No defects such as short circuit, open circuit, misalignment, etc.
- Compliant with ROHS requirements
- Tensile Strength Standard Compliant with UL486A

PIN ASSIGNMENT		
P1	Color	P2
1	Red	Tin
2	Black	Tin

4	External Mold	Molded 45P PVC Black	G	/	
	Internal Model	Molded PE Transparent	G	/	
3	SCT2505MH-02CBK109	SM 2.50mm PA66 V2 Black 02Pin With Lock Male Housing	PCS	1	
2	SCT2505FTPS109	SM 2.50mm Phosphor Bronze Tin Plated Female Terminal 22-28AWG	PCS	2	
1	UL24642W2435BK0201	UL 2464 24AWG*2C PVC Wire,OD:3.5mm Color:Red,Black L= (Can Be Customized)	PCS	1	
NO	PART NO	DESCRIPTION	UNIT	Q'TY	REMARK

SCONDAR

SCONDAR ELECTRONIC LIMITED

TOLERANCES: ±0.3mm		UNIT: mm	PAGE/ 1 of 1
		Rev A	
REV	DESCRIPTION	DATE	ECN NO.
A	INITIAL RELEASE	2025.05.14	
			SCONDAR ELECTRONIC, LTD ENGINEER 2505
			APPROVED BY
			Lisa
			TITLE: SCT2505MH-02Pin Male Housing -Tin UL 2464 24AWG*2C(Can Be Customized)

A B C D E F G H