


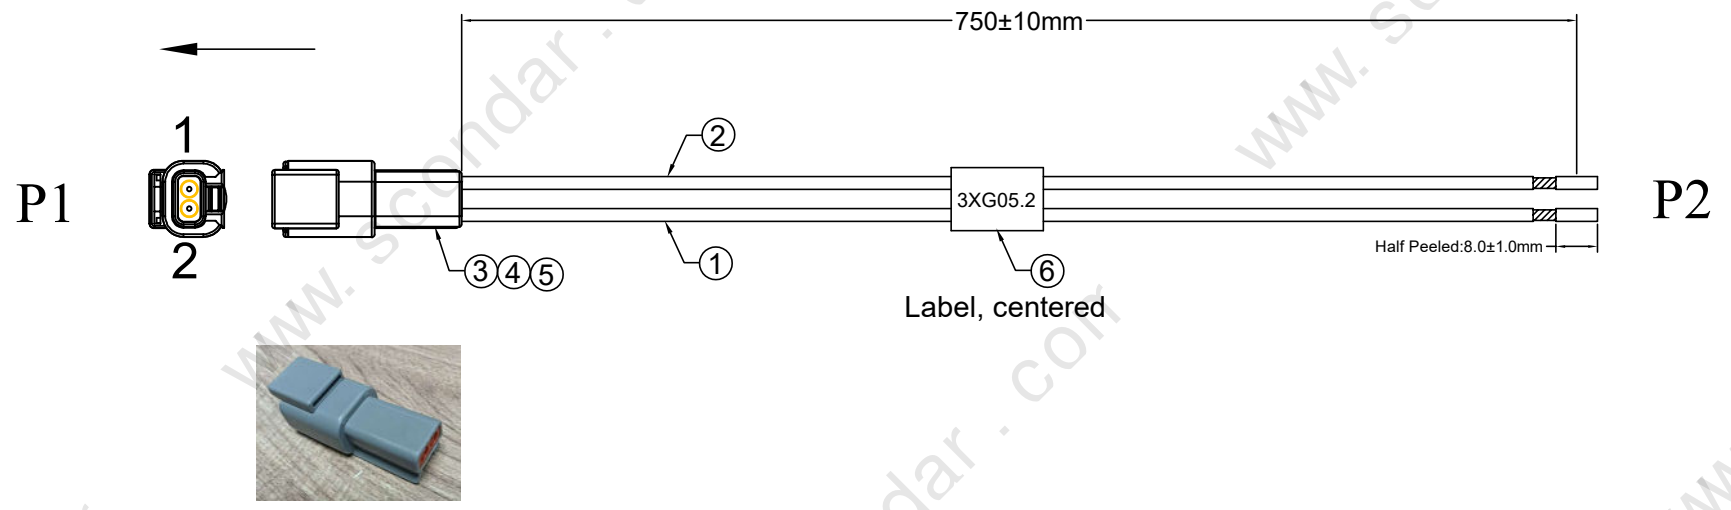

Technical requirements:
-100% inspection of products.
-Compliant with ROHS requirements.
-Tensile Strength Standard Compliant with UL486A.

6	HTB-ID500-WT-N	Heat Shrink Tube OD:5.0mm NO-Printing Color:White	MM	15	
5	DTM04-2P-HS	DTM04-2P Wire clip, PBT orange	PCS	1	
4	DTM04-2P	DTM04-2P PA66 V0 Grey 02Pin Female Housing	PCS	1	
3	DTM1060-20-0122	DTM1060-20-0122 High precision phosphor copper Nickel Plated Male Terminal 16-22AWG	PCS	2	
2	UL326618TSBNP1201	UL3266 18AWG(34/0.178TS) OD:2.1mm XL-PE Wire, Color:Brown	MM	770	
1	UL326618TSWTP1201	UL3266 18AWG(34/0.178TS) OD:2.1mm XL-PE Wire, Color:White	MM	770	
NO	PART NO	DESCRIPTION	UNIT	Q'TY	REMARK

PIN ASSIGNMENT		
P1	Color	P2
1	Brown	Half Peeled
2	White	Half Peeled

SCONDAR ELECTRONIC LIMITED

TOLERANCES: ±0.3mm

UNIT: mm

PAGE/ 1 of 1

SCT P/N

SCT-RW0003

Rev A

CUSTOMER P/N

CUSTOMER

Robot Wiring Wire Harness

TITLE: DTM04-2Pin Female Housing To Half Peeled:8.0mm UL3266 18AWG WT/BN L=750mm

REVISIONS				DATE	2026.08.10
REV	DESCRIPTION	DATE	ECN NO.	DRAWN BY	Yao
A	INITIAL RELEASE	2026.08.10		CHECKED BY	Xiong
				APPROVED BY	Lisa